



PCR-4X4 & SUV-LTR TIRES

petlas
TRACK OF TRUST



NOTICES & DISCLAIMER

- For load capacity and inflating pressure figures on different speed rates, please consult the producer company.
- Our company is entitled to change any information in this brochure without prior notice. This brochure overrides any previous documents.
- All figures are for reference and our company cannot be deemed responsible for printing errors.
- The visual content of this brochure is only representative. To find the compatible tire for your vehicle, please refer to the vehicle service or authorized tire dealer.

CONTENTS

Page 2 **RANGE OF PETLAS TIRES**

Page 4 **PETLAS TIRES BY SIZE**

Passenger Tires

4x4 Tires

LTR Tires

Page 8 **GENERAL INFORMATION**

Sidewall Markings

Radial Tire Construction

Important Definitions Related

Dimensions

Speed Index Table

Load Index Table

Page 70 **TECHNICAL TABLE**

PCR Tires

4x4 Tires

LTR Tires

PASSENGER TIRES

PT311	PT515	PT525	PT535	PT711	PT741	PT565	W601	W651	W661
16	18	20	22	24	26	30	32	34	36

SUV, 4X4 TIRES

PT411	PT421	PT431	SuvMaster A/S	W671	W681
40	42	44	46	48	50

LTR TIRES

PT825	PT825 plus	PT835	PT875	PT925	PT935	PT945
54	56	58	60	62	64	66

PASSENGER TIRES



PT311 ELEGANT



PT741 VELOX SPORT



PT515 IMPERIUM



PT565 MULTI ACTION
All Weather Tire



PT525 PROGREN



W601 SNOW MASTER
Winter Tire



PT535 IMPERIUM
All Weather Tire



W651 SNOW MASTER
Winter Tire



PT711 VELOX SPORT



W661 GLACIER
Winter Tire

RANGE OF PETLAS TIRES

SUV - 4X4 TIRES



PT411 A/S EXPLERO

All Weather Tire



PT421 A/S EXPLERO



PT431 H/T EXPLERO



SuvMaster A/S

All Weather Tire



W671 EXPLERO

Winter Tire



W681 EXPLERO ICE

Winter Tire

LTR TIRES



PT825 FULL
POWER



PT825 FULL
POWER PLUS



PT835 FULL
POWER



PT875 ADVENTE

All Weather Tire



PT925 FULL GRIP

All Weather Tire



PT935 FULL GRIP

Winter Tire



PT945 FULL GRIP

Winter Tire

PT311 Elegant

165/80 R12	77T
155/80 R13	79T
165/80 R13	83T
165/80 R13 RF	87R
175/80 R14	88T
165/80 R15	87T
145/70 R12	69T
155/70 R12	73T
165/70 R12	77T
175/70 R12	80T
145/70 R13	71T
155/70 R13	75T
165/70 R13	79T
165/70 R13 RF	83T
175/70 R13	82T
185/70 R13	86T
165/70 R14	81T
165/70 R14 RF	85R
175/70 R14	84T
175/70 R14 RF	88T
185/70 R14	88T
195/70 R14	91T
195/70 R15 RF	97T
155/65 R13	73T
165/65 R13	77T
175/65 R13	80T
155/65 R14	75T
165/65 R14	79T
175/65 R14	82T
175/65 R14 RF	86T
185/65 R14	86T
195/65 R14	89H
175/65 R15	84T
185/65 R15	88T
195/65 R15	91T
195/65 R15 RF	95T
165/60 R14	75T



PT515 Imperium

175/70 R13	82H
175/70 R14	84H
175/70 R14 RF	88H
185/70 R14	88H
175/65 R14	82H
175/65 R14 RF	86T
185/65 R14	86H
175/65 R15	84H
185/65 R15	88H
185/65 R15 RF	92H
195/65 R15	91H
195/65 R15	91V
195/65 R15 RF	95H
205/65 R15	94H
205/65 R15 RF	99H
205/65 R15	94V
215/65 R15	96V
205/65 R16	95H



215/65 R16	98H
215/65 R16	98V
175/60 R13	77H
185/60 R14	82H
195/60 R14	86H
205/60 R14	88V
185/60 R15	84H
185/60 R15 RF	88H
195/60 R15	88H
195/60 R15	88V
205/60 R15	91H
205/60 R15	91V
205/60 R16	92H
205/60 R16	92V
205/60 R16 RF	96V
185/55 R15	82V
205/55 R15	88V
195/55 R16	87V
205/55 R16	91H
205/55 R16	91V
215/55 R16	93V
205/50 R15	86V



PT525 Progreen

175/70 R14	84T
175/70 R14 RF	88T
185/70 R14	88T
175/65 R14	82T
185/65 R14	86T
185/65 R15	88T
185/65 R15	88H
195/65 R15	91H
195/65 R15 RF	95T
195/65 R15	91V
205/65 R15	94H
185/60 R14	82H
185/60 R15	84H
185/60 R15 RF	88H
195/60 R15	88H
205/60 R16	92H
205/60 R16	92V
205/60R16 RF	96V
215/60 R16	95V
185/55 R14	80H
185/55 R15	82V
195/55 R15	85H
195/55 R16	87H
205/55 R16	91H
195/50 R15	82H
195/50 R16 RF	88V



PT535 Imperium

175/70 R14	84H
175/65 R14	82H
185/65 R14	86H
185/65 R15	88H
185/65 R15 RF	92H
195/65 R15	91H
195/65 R15 RF	95H
185/60 R15	84H
185/60 R15 RF	88H
195/60 R15	88H
195/55 R16	87H
205/55 R16	91H
195/50 R16	84H



PT711 Velox Sport

185/60 R13	80H
------------	-----



PT741 Velox Sport

215/60 R16 RF	99V
225/60 R16	98V
235/60 ZR16	100W
195/55 R15	85V
185/55 R16 RF	87H
195/55 R16	87V
195/55 R16 RFT	87V
205/55 R16 RFT	91V
205/55 ZR16 RF	94W
215/55 ZR16 RF	97W
225/55 ZR16 RF	99W
205/55 ZR17 RF	95W
215/55 ZR17 RF	98W
225/55 ZR17 RF	101W
225/55 ZR17 RFT	97W
235/55 ZR17 RF	103W
235/55 ZR18 RF	104W
195/50 R15	82V
195/50 R16	84V
205/50 ZR16 RF	91W
225/50 ZR16 RF	96W
205/50 ZR17 RF	93W
205/50 ZR17 RFT	89W
215/50 ZR17 RF	95W

225/50 ZR17 RF	98W
225/50 ZR17 RFT	94W
235/50 ZR18 RF	101W
245/50 ZR18	100W
245/50 R18 RFT	100W
195/45 R16 RF	84V
205/45 ZR16 RF	87W
215/45 R16 RF	90V
205/45 ZR17 RF	88W
215/45 ZR17 RF	91W
225/45 ZR17 RF	94W
225/45 ZR17 RFT	91W
235/45 ZR17 RF	97W
245/45 ZR17 RF	99W
215/45 ZR18 RF	93W
225/45 ZR18 RF	95W
225/45 ZR18 RFT	91W
235/45 ZR18 RF	98W
245/45 ZR18 RF	100W
245/45 ZR18 RFT	96W
255/45 ZR18 RF	103W
275/45 ZR18 RF	107W
225/45 ZR19 RF	96W
235/45 ZR19 RF	99W
245/45 ZR19 RF	102W
245/45 ZR19 RFT	98W
255/45 ZR19 RF	104Y
205/40 ZR16 RF	83W
215/40 ZR16 RF	86W
205/40 ZR17 RF	84W
215/40 ZR17 RF	87W
235/40 ZR17 RF	94W
245/40 ZR17 RF	95W
215/40 ZR18 RF	89W
215/40 R18 - RFT	85Y
225/40 ZR18 RF	92Y
225/40 R18 RFT-RF	92Y
235/40 ZR18 RF	95W
245/40 ZR18 RF	97W
245/40 ZR18 RFT	93W
255/40 ZR18	95W
255/40 R18 RFT	95Y
265/40 ZR18 RF	101Y
275/40 ZR18 RF	103Y
275/40 R18 RFT	99Y
225/40 ZR19 RF	93W
225/40 R19 RFT-RF	93Y
235/40 ZR19 RF	96Y
245/40 ZR19 RF	98W
245/40 ZR19 RFT	94W
255/40 ZR19 RF	100W
265/40 ZR19 RF	102W
275/40 ZR19 RF	105Y
275/40 R19 RFT	101Y
285/40 ZR19 RF	107W
245/40 ZR20 RF	99W
245/40 R20 RFT-RF	99Y
255/40 ZR20 RF	101W
245/35 ZR17	87W
215/35 ZR18 RF	84W
225/35 ZR18 RF	87W

PETLAS TIRES BY SIZE

245/35 ZR18 RF	92W
245/35 R18 RFT	88Y
255/35 ZR18 RF	94Y
255/35 R18 RFT	90Y
265/35 ZR18 RF	97W
275/35 ZR18 RF	99W
275/35 R18 RFT	95Y
285/35 ZR18 RF	101W
285/35 R18 RFT	97Y
295/35 ZR18	99Y
215/35 ZR19 RF	85W
225/35 ZR19 RF	88W
225/35 R19 RFT-RF	88Y
235/35 ZR19 RF	91W
245/35 ZR19 RF	93W
245/35 R19 RFT-RF	93Y
255/35 ZR19 RFT	92W
255/35 ZR19 RF	96W
265/35 ZR19 RF	98W
275/35 ZR19 RF	100W
275/35 R19 RFT	96W
285/35 ZR19	99Y
285/35 R19 RFT	99Y
295/35 ZR19 RF	104W
225/35 ZR20 RF	90Y
225/35 R20 RFT-RF	90Y
245/35 ZR20 RF	95W
245/35 R20 RFT-RF	95Y
255/35 ZR20 RF	97W
265/35 ZR20 RF	99W
275/35 ZR20 RF	102Y
275/35 R20 RFT-RF	102Y
295/35 ZR20 RF	105W
245/30 ZR19 RF	89W
255/30 ZR19 RF	91W
255/30 R19 RFT-RF	91Y
265/30 ZR19 RF	93W
275/30 ZR19 RF	96W
275/30 R19 RFT-RF	96W
285/30 ZR19 RF	98W
295/30 ZR19 RF	100W
305/30 ZR19 RF	102W
245/30 ZR20 RF	90Y
255/30 ZR20 RF	92Y
255/30 R20 RFT-RF	92Y
265/30 ZR20 RF	94Y
275/30 ZR20 RF	97W
275/30 R20 RFT-RF	97Y
285/30 ZR20 RF	99W
295/30 ZR20 RF	101W
305/30 ZR20 RF	103W

PT565 Multi Action

155/70 R13	75T
165/70 R13	79T
175/70 R13	82T
175/70 R14	84T
175/65 R14	82T
185/65 R14	86T
175/65 R15	84H
185/65 R15	88T
185/65 R15	88H
195/65 R15	91H
195/65 R15 RF	95H
205/65 R15	94H
215/65 R16 RF	102V
185/60 R14	82H
185/60 R15 RF	88H
195/60 R15	88H
205/60 R16	92V
215/60 R16 RF	99V
185/55 R14	80H
185/55 R15 RF	86H
195/55 R15	85H
195/55 R16	87H
205/55 R16	91H
205/55 R16	91V
205/55 R16 RF	94V
215/55 R16 RF	97V
225/55 R16 RF	99W
205/55 R17 RF	95W
215/55 R17 RF	98W
225/55 R17 RF	101W
235/55 ZR17 RF	103W
195/55 R20 RF	95H
195/50 R15	82V
195/50 R16 RF	88V
205/50 R17 RF	93W
215/50 R17 RF	95W
225/50 R17 RF	98V
195/45 R16 RF	84V
215/45 R16 RF	90V
205/45 R17 RF	88W
215/45 ZR17 RF	91W
225/45 R17 RF	94W
235/45 R17 RF	97W
245/45 R17 RF	99Y
225/45 R18 RF	95W
225/45 ZR18 RF	95Y
235/45 R18 RF	98W
245/45 R18 RF	100W
225/45 R19 RF	96W
245/40 ZR17 RF	95Y
225/40 R18 RF	92W
235/40 ZR18 RF	95Y
245/40 R18 RF	97Y
235/40 ZR19 RF	96Y
235/35 ZR19 RF	91Y
245/35 R19 RF	93Y
255/35 ZR19 RF	96Y

W601 Snow Master

155/80 R13	79T
165/80 R13	83T
175/80 R14	88T
145/70 R13	71T
155/70 R13	75T
165/70 R13	79T
165/70 R13 RF	83T
175/70 R13	82T
185/70 R13	86T
165/70 R14	81T
165/70 R14 RF	85R
175/70 R14	84T
175/70 R14 RF	88T
185/70 R14	88T
195/70 R14	91T
195/70 R15 RF	97T
155/65 R13	73T
165/65 R13	77T
175/65 R13	80T
155/65 R14	75T
165/65 R14	79T
175/65 R14	82T
175/65 R14 RF	86T
185/65 R14	86T
175/65 R15	84T
165/60 R14	75T



W651 Snow Master

185/65 R15	88H
185/65 R15 RF	92H
195/65 R15	91H
195/65 R15 RF	95H
205/65 R15	94H
215/65 R15	96H
205/65 R16	95H
215/65 R16	98H
215/65 R16 RF	102T
185/60 R14	82H
185/60 R15	84H
195/60 R15	88H
205/60 R15	91H
205/60 R16	92H
215/60 R16	95H
225/60 R16	98H
235/60 R16	100H
185/55 R14	80H
185/55 R15	82H
195/55 R15	85H
205/55 R15	88V
205/55 R15 RF	92V
185/55 R16 RF	87H
195/55 R16	87H
205/55 R16	91H

205/55 R16 RFT	91H
215/55 R16	93H
225/55 R16	95H
205/55 R17	91H
215/55 R17 RF	98V
225/55 R17	97H
225/55 R17 RF	101V
225/55 R17 RFT	97V
235/55 R17 RF	103V
195/50 R15	82H
205/50 R15	86H
195/50 R16	84H
205/50 R16 RF	91H
225/50 R16 RF	96V
205/50 R17 RF	93V
215/50 R17	91H
225/50 R17 RF	98V
215/50 R18	92V
245/50 R18 RF	104V
235/50 R19 RF	103V
195/45 R16 RF	84H
205/45 R16 RF	87H
215/45 R16 RF	90V
205/45 R17 RF	88H
215/45 R17 RF	91V
225/45 R17 RF	94V
235/45 R17 RF	97V
245/45 R17 RF	99V
215/45 R18 RF	93V
225/45 R18 RF	95V
235/45 R18 RF	98V
245/45 R18 RF	100V
245/45 R18 RFT-RF	100V
245/45 R19 RF	102V
245/40 R17 RF	95V
225/40 R18 RF	92V
235/40 R18 RF	95V
245/40 R18 RF	97V
245/40 R19 RF	98V
255/40 R19 RF	100V



W661 Glacier

175/70 R13	82T
175/65 R14	82T
185/65 R14	86T
185/65 R15	88T
195/65 R15	91T
205/65 R15	94T

RF : REINFORCED
RFT : RUN FLAT

petlas

185/60 R15 RF	88T
195/60 R15	88T
205/60 R16	92T
205/60 R16 RF	96T
195/55 R16	87T
205/55 R16	91T
215/55 R16 RF	97T
215/55 R17 RF	98T
225/55 R17 RF	101T
215/50 R17 RF	95T
225/50 R17 RF	98T
225/45 R17 RF	94T



PT421 A/T Explero

205/80 R16 RF	104T
215/80 R15	102S
235/75 R15	105T
255/70 R15	108T
265/70 R15 RF	116T
235/70 R16	106T
245/70 R16 RF	111T
215/65 R16	98T
265/65 R17 RF	116S
255/60 R18 RF	112H
265/60 R18 RF	114T



SuvMaster A/S

255/55 R18	109W
UNDER DEVELOPMENT SIZES	
235/65 R17 RF	108W
215/65 R17 RF	103V
235/60 R18 RF	107W
225/60 R18 RF	104W
215/60 R17 RF	100V
255/55 R18 RF	109Y
235/55 R19 RF	105W
235/55 R18 RF	104V
225/55 R18 RF	102V
215/55 R18 RF	99V
235/50 R18 RF	101Y
215/50 R18	92W
245/45 R19 RF	102Y
235/45 R19 RF	99Y

255/60 R18 RF	112H
265/60 R18 RF	114H
235/55 R17 RF	103V
215/55 R18	95H
225/55 R18 RF	102H
235/55 R18 RF	104H
255/55 R18 RF	109V
205/55 R19 RF	97H
225/55 R19	99H
235/55 R19 RF	105V
245/55 R19	103H
255/55 R19 RF	111V
275/55 R19	111H
235/50 R18 RF	101V
235/50 R19 RF	103V
255/50 R19 RF	107V
255/50 R19 RFT-RF	107V
245/50 R20	102V
265/50 R20 RF	111H
225/45 R19 RF	96V
285/45 R19 RF	111H
275/45 R20 RF	110V
275/40 R20 RF	106V
315/35 R20 RF	110V



PT411 A/S Explero

235/75 R15	105H
205/70 R15	96H
215/70 R15	98H
215/70 R16	100H
225/70 R16 RF	107T
235/70 R16	106H
245/70 R16	107H
255/70 R16	111T
265/70 R16	112T
215/65 R16	98H
215/65 R16 RF	102H
255/65 R16	109H
215/65 R17	99H
225/65 R17	102H
235/65 R17 RF	108H
245/65 R17 RF	111H
255/65 R17	110H
265/65 R17	112H
215/60 R16	95H
235/60 R16	100H
225/60 R17 RF	103H
255/60 R18 RF	112V

PT431 H/T Explero

225/65 R17	102H
235/65 R17 RF	108V
215/60 R17	96V
235/60 R17	102V
255/60 R17	106V
225/60 R18	100H
235/60 R18 RF	107V
245/60 R18	105H
255/60 R18 RF	112V
265/60 R18	110H
265/60 R18	110V
225/55 R17	97V
235/55 R17 RF	103V
215/55 R18	95H
225/55 R18	98V
235/55 R18	100V
255/55 R18 RF	109V
225/55 R19	99H
235/55 R19 RF	105V
245/55 R19	103H
255/55 R19 RF	111V
275/55 R19	111V
255/55 ZR20 RF	110Y
235/50 R18 RF	101V
235/50 ZR19 RF	103W
255/50 R19 RF	107V
255/50 ZR19 RFT-RF	107W
265/50 ZR19 RF	110W
255/50 ZR20 RF	109Y
275/45 ZR19 RF	108W
285/45 R19	107V
255/45 ZR20 RF	105Y
275/45 ZR20 RF	110W
285/45 ZR20 RF	112Y
275/40 ZR20	102W
275/40 R20 RFT-RF	106Y

W671 Explero

215/80 R15	102S
205/80 R16 RF	104T
235/75 R15 RF	109T
205/70 R15	96T
215/70 R15	98H
215/70 R16 RF	104H
225/70 R16 RF	107H
235/70 R16	106T
245/70 R16 RF	111T
255/70 R16	111T
265/70 R16	112T
215/65 R17	99H
225/65 R17 RF	106h
235/65 R17 RF	108V
245/65 R17 RF	111H
255/65 R17 RF	114H
265/65 R17 RF	116H
215/60 R17 RF	100H
225/60 R17 RF	103V
235/60 R17 RF	106H
255/60 R17 RF	110V
225/60 R18 RF	104V
235/60 R18 RF	107H
245/60 R18 RF	105H

W681 Explero Ice

245/70 R16 RF	111T
215/65 R16 RF	102T
215/60 R17 RF	100T



PETLAS TIRES BY SIZE

PT825 Full Power

195 R15 C 8PR 106/104R



215/65 R15 C 6PR 104/102T
215/65 R16 C 8PR 109/107T
195/65 R16 C 8PR 104/102T
285/65 R16 C 10PR 128N
195/60 R16 C 6PR 99/97T



215/70 R15 C 8PR 109/107R
225/70 R15 C 8PR 112/110R
205/65 R15 C 8PR 102/100T
205/65 R16 C 8PR 107/105T
215/65 R16 C 8PR 109/107R
225/65 R16 C 8PR 112/110R
235/65 R16 C 8PR 115/113R
195/60 R16 C 6PR 99/97T



PT825 Full Power Plus

5.00 R12 C 8PR 83/81P
155 R12 C 8PR 88/86N
155 R13 C 8PR 90/89R
185 R14 C 8PR 102/100R
195 R14 C 8PR 106/104R
205 R14 C 8PR 109/107P
215 R14 C 8PR 112/110P
185 R15 C 8PR 103/102R
175/75 R16 C 8PR 101/99R
185/75 R16 C 8PR 104/102R
195/75 R16 C 8PR 107/105R
205/75 R16 C 8PR 110/108R
205/75 R16 C 10PR 113/111R
215/75 R16 C 8PR 113/111R
215/75 R16 C 10PR 116/114R
225/75 R16 C 8PR 118/116R
165/70 R14 C 6PR 89/87R
195/70 R15 C 8PR 104/102R
205/70 R15 C 8PR 106/104R
215/70 R15 C 8PR 109/107S
225/70 R15 C 8PR 112/110R
225/70 R15 C 10PR 116/114R
205/65 R15 C 8PR 102/100T
205/65 R16 C 8PR 107/105T
215/65 R16 C 8PR 109/107R
225/65 R16 C 8PR 112/110R
235/65 R16 C 8PR 115/113R



PT875 Advente

155 R12 C 8PR 88/86N
155 R13 C 8PR 90/89R
185 R14 C 8PR 102/100R
195 R14 C 8PR 106/104R
185/75 R16 C 8PR 104/102R
195/75 R16 C 8PR 107/105R
205/75 R16 C 8PR 110/108R
215/75 R16 C 8PR 113/111R
225/75 R16 C 8PR 118/116R
195/70 R15 C 8PR 104/102R
205/70 R15 C 8PR 106/104R
215/70 R15 C 8PR 109/107R
225/70 R15 C 8PR 112/110R
205/65 R15 C 8PR 102/100T
205/65 R16 C 8PR 107/105T
215/65 R16 C 8PR 109/107R
225/65 R16 C 8PR 112/110R
235/65 R16 C 8PR 115/113R



PT 935 Full Grip

155 R12 C 8PR 88/86N
155 R13 C 8PR 90/89N
185 R14 C 8PR 102/100R
195 R14 C 8PR 106/104R
185/75 R16 C 8PR 104/102R
195/75 R16 C 8PR 107/105R
205/75 R16 C 10PR 113/111R
215/75 R16 C 10PR 116/114R
225/75 R16 C 8PR 118/116R
195/70 R15 C 8PR 104/102R
205/70 R15 C 8PR 106/104R
215/70 R15 C 8PR 109/107R
225/70 R15 C 8PR 112/110R
215/65 R15 C 6PR 104/102T
195/65 R16 C 8PR 104/102T
205/65 R16 C 8PR 107/105T
215/65 R16 C 8PR 109/107R
225/65 R16 C 8PR 112/110R
235/65 R16 C 8PR 115/113R
235/65 R16 C 12PR 121/119R
285/65 R16 C 10PR 128N
195/60 R16 C 6PR 99/97T



PT835 Full Power

215/75 R16 C 8PR 113/111R
215/75 R16 C 10PR 116/114R
205/75 R16 C 8PR 110/108R
225/70 R15 C 8PR 112/110R
235/65 R16 C 8PR 115/113R
235/65 R16 C 12PR 121/119R
205/65 R16 C 8PR 107/105T



PT925 Full Grip

155 R12 C 8PR 88/86N
155 R13 C 8PR 90/89N
185 R14 C 8PR 102/100R
195 R14 C 8PR 106/104R
175/75 R16 C 8PR 101/99R
185/75 R16 C 8PR 104/102R
195/75 R16 C 8PR 107/105R
205/75 R16 C 8PR 110/108R
215/75 R16 C 8PR 113/111R
225/75 R16 C 8PR 118/116R
195/70 R15 C 8PR 104/102R
205/70 R15 C 8PR 106/104R



PT 945 Full Grip

215/75 R16 10PR 116/114R
235/65 R16 12PR 121/119R



RF: REINFORCED
RFT: RUN FLAT

petlas

There are certain markings on the sidewalls of each tire. Below, you can find remarks and notices about the sidewall markings and the properties they depict:

DOT Symbol:

Proves that tyre complies with DOT regulations.

European Commision of Economics Confirmation :

It is the legitimate proof that tires comply with all ECE directives and is represented by a common and unique confirmation number due to regulation.

Max. Load and Pressure Markings:

It is a necessary marking on sidewalls of tires which complies with DOT directives It consists of necessary information about max.load and pressure of tyres.

"European Commision of Economics" Tire Verification Symbol:

This symbol proves that the tyre complies with all necessary standards disclaimed by European Commision of Economics.

Construction Info:

It represents type of material used in sidewall and base in accordance with DOT regulation.

UTQG Quality Indicator:

- **Wear Life Indicator:** A wear life index as 100 indicates that the tire life is appropriate when tested under standard conditions. Tire life may significantly depend on road or climate conditions and service properties. While 100 is a good rating, more than 100 means "very good" and below 100 means translates as a weak reputation.
- **Traction Class Indicator:** Demonstrates the ability to stop on wet asphalt or concrete roads under controlled conditions. Traction grades are AA, A, B and C in order of highest grades.
- **Heat Resistance Indicator:** Indicates a tire's resistance to generation of heat and its ability to dissipate heat. Temperature grades, from highest to lowest are AB, B and C.


Speed class and load index :

European ETRTO standards set the maximum load limits of a tire.



SIDEWALL MARKINGS

- | | |
|-----------------------------------|-----------------------------------|
| 1 – Brand Logo | 13 – Speed Index |
| 2 – Construction Information | 14 – Safety Warnings |
| 3 – Manufacturing Country | 15 – Outside |
| 4 – Max. Load and Pressure Rating | 16 – ECE approval number |
| 5 – Mold No | 17 – Max. Load Index |
| 6 – Construction Type | 18 – Tire Size |
| 7 – DOT Mark | 19 – Pattern Name |
| 8 – Factory Code | 20 – Temperature Resistance Index |
| 9 – Tubeless | 21 – Tire Road Grip Index |
| 10 – Product Code | 22 – Tire Wear Index Resistance |
| 11 – Date of Manufacture | 23 – UTOG Quality Indicator |
| 12 – ECE approval mark | |

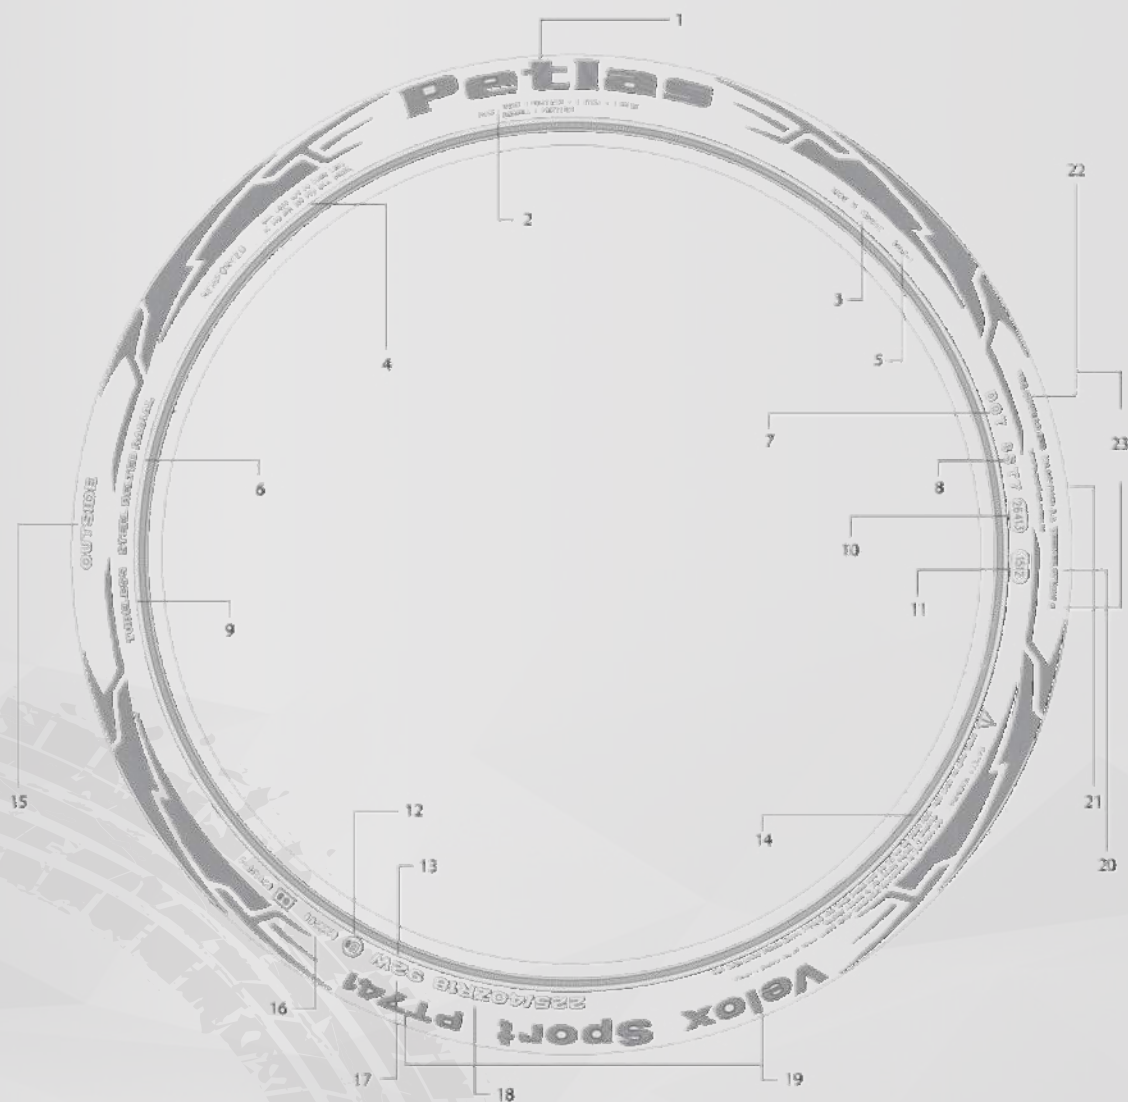

TIRE PROFESSIONALS!

MAKE YOUR


Choice



petlas.com

petlas
TRACK OF TRUST

RADIAL TIRE CONSTRUCTION

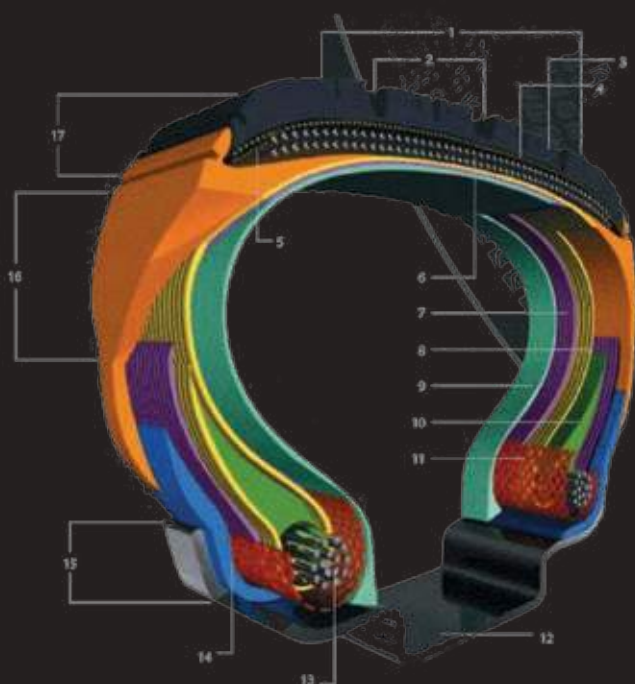


- Tread
- Water Channeling
- Blocks
- Nylon Impact Layer
- Reinforcement Layer
- Steel Cords
- First Carcass Layer
- Second Carcass Layer
- Innerliner
- Bead Filling
- Bead Reinforcement fabric
- Rim
- Bead Wire
- Rim Cushion
- Rim Flange
- Sidewall
- Shoulder

IMPORTANT DEFINITIONS


The tire is generally defined with such parameters as the maximum cross-section width corresponding to the standart inflation pressure in the measurement rim, nominal diameter of the rim to be attached, speed index, load capacity index and the cross-section ratio.

EXAMPLE :
TIRE SIZE 225/40 ZR18 92W

- Cross – section width 225 mm (Max. distance between sidewalls of an inflated tire)
- Series – the cross-section height to crosssection width (%55)
- Radial body structure (R)
- Symbol of rim diameter (inch) (18)
- Load index (92)
- Speed symbol (W)
- Serial no; each producer's coding consisting of the production data
- Abrasion indicator (TWI)
- Usable in a tubeless way or with the tubetype usage
- U.S. Department of Transportation compliance symbol (DOT)
- European Community Compliance symbol and registry no (E)
- Arrow for direction of rotation, inside/outside

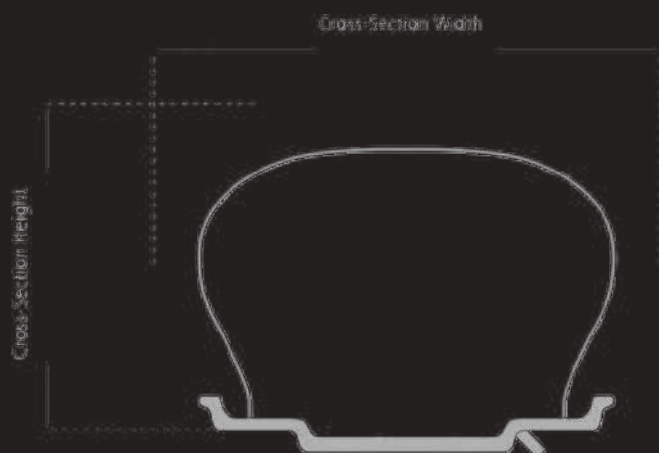

SPEED SYMBOL TABLE

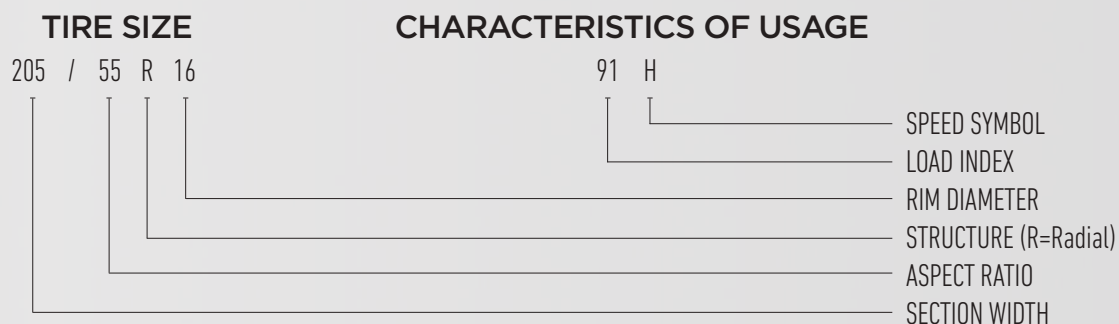

Speed Symbol Table

It is the alphabetical code of the velocity which the tire can perform.

Speed Symbol	Speed Limit (km/h)	Speed Symbol	Speed Limit (km/h)	Speed Symbol	Speed Limit (km/h)
A1	5	D	65	Q	160
A2	10	E	70	R	170
A3	15	F	80	S	180
A4	20	G	90	T	190
A5	25	J	100	U	200
A6	30	K	110	H	210
A7	35	L	120	V	240
A8	40	M	130	W	270
B	50	N	140	Y	300
C	60	P	150	ZR	270 km+

LOAD INDEX TABLE

The load index is a symbol which shows the maximum load capacity of the vehicle per tire.

A	B	A	B	A	B	A	B	A	B	A	B
60	250	96	710	132	2000	168	5600	204	16000	240	45000
61	257	97	730	133	2060	169	5800	205	16500	241	46250
62	265	98	750	134	2120	170	6000	206	17000	242	47500
63	272	99	775	135	2180	171	6150	207	17500	243	48750
64	280	100	800	136	2240	172	6300	208	18000	244	50000
65	290	101	825	137	2300	173	6500	209	18500	245	51500
66	300	102	850	138	2360	174	6700	210	19000	246	53000
67	307	103	875	139	2430	175	6900	211	19500	247	54500
68	315	104	900	140	2500	176	7100	212	20000	248	56000
69	325	105	925	141	2575	177	7300	213	20600	249	58000
70	335	106	950	142	2650	178	7500	214	21200	250	60000
71	345	107	975	143	2725	179	7750	215	21800	251	61500
72	355	108	1000	144	2800	180	8000	216	22400	252	63000
73	365	109	1030	145	2900	181	8250	217	23000	253	65000
74	375	110	1060	146	3000	182	8500	218	23600	254	67000
75	387	111	1090	147	3075	183	8750	219	24300	255	69000
76	400	112	1120	148	3150	184	9000	220	25000	256	71000
77	412	113	1150	149	3250	185	9250	221	25750	257	73000
78	425	114	1180	150	3350	186	9500	222	26500	258	75000
79	437	115	1215	151	3450	187	9750	223	27250	259	77500
80	450	116	1250	152	3550	188	10000	224	28000	260	80000
81	462	117	1285	153	3650	189	10300	225	29000	261	82500
82	475	118	1320	154	3750	190	10600	226	30000	262	85000
83	487	119	1360	155	3875	191	10900	227	30750	263	87500
84	500	120	1400	156	4000	192	11200	228	31500	264	90000
85	515	121	1450	157	4125	193	11500	229	32500	265	92500
86	530	122	1500	158	4250	194	11800	230	33500	266	95000
87	545	123	1550	159	4375	195	12150	231	34500	267	97500
88	560	124	1600	160	4500	196	12500	232	35500	268	100000
89	580	125	1650	161	4625	197	12850	233	36500	269	103000
90	600	126	1700	162	4750	198	13200	234	37500	270	106000
91	615	127	1750	163	4875	199	13600	235	38750	271	109000
92	630	128	1800	164	5000	200	14000	236	40000	272	112000
93	650	129	1850	165	5150	201	14500	237	41250	273	115000
94	670	130	1900	166	5300	202	15000	238	42500	274	118000
95	690	131	1950	167	5450	203	15500	239	43750	275	121500

- (A) Load Index
(B) The weight a tyre can carry (kg)

PASSENGER CAR TIRES



PT311



SUMMER



PT515



SUMMER



PT525



SUMMER



PT535



SUMMER/WINTER



M+S



PT711



SUMMER



ITS NOT FAR
Together



PT741



SUMMER



PT565



SUMMER/WINTER



M+S



W601



WINTER



M+S



W651



WINTER



M+S



W661



WINTER



M+S



PT311 Elegant

Developed for performance and handling for the general use segment. Offers traction and riding comfort combined with durability.



PERFORMANCE AND HANDLING ON ANY ROAD

PATTERN PROPERTIES



- Circumferential rib on the tread center improves handling and braking performance



- Stiff shoulder blocks enable exceptional cornering performance at high speeds, and provide resistance against irregular wear.



- Computer simulated block array minimizes road / pattern noise, and enhances driving comfort.



- Depending on the size of the tire, three or four different grooves provide excellent water drainage, and reduce the risk of aquaplaning significantly.





■ ALL SIZES

155/80 R12	77T
155/80 R13	79T
165/80 R13	83T
165/80 R13 RF	87R
175/80 R14	88T
165/80 R15	87T
145/70 R12	69T
155/70 R12	73T
165/70 R12	77T
175/70 R12	80T

145/70 R13	71T
155/70 R13	75T
165/70 R13	79T
165/70 R13 RF	83T
175/70 R13	82T
185/70 R13	86T ●●
165/70 R14	81T
165/70 R14 RF	85R
175/70 R14	84T
175/70 R14 RF	88T

185/70 R14	88T ●●
195/70 R14	91T ●●
195/70 R15 RF	97T ●●
155/65 R13	73T
165/65 R13	77T
175/65 R13	80T
155/65 R14	75T
165/65 R14	79T
175/65 R14	82T
175/65 R14 RF	86T

185/65 R14	86T ●●
195/65 R14	89H ●●
175/65 R15	84T
185/65 R15	88T ●●
195/65 R15	91T ●●
195/65 R15 RF	95T ●●
165/60 R14	75T

RF : REINFORCED

●● : Sizes with two rib design



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Patial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.

High Tech Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

PRODUCT OVERVIEW

PT515 Imperium

Designed and produced with latest technology. It offers good mileage and excellent braking performance in both wet and dry conditions.



GRIP THE ROAD SAFELY

PATTERN PROPERTIES



- Circumferential plain block attached to the shoulder provides excellent handling and braking performance on dry and wet roads.



- Asymmetric tread pattern enables exceptional performance.



- Stiff shoulder blocks provide exceptional cornering performance at high speeds and ensure resistance against irregular wear.



- Computer simulated block array with inner and outer lateral channels minimizes road / pattern noise and enhances driving comfort.



- Four different grooves provide excellent water drainage, reducing the risk of aquaplaning significantly.





■ ALL SIZES

175/70 R13	82H
175/70 R14	84H
175/70 R14 RF	88H
185/70 R14	88H
175/65 R14	82H
175/65 R14 RF	86T
185/65 R14	86H
175/65 R15	84H
185/65 R15	88H
185/65 R15 RF	92H

195/65 R15	91H
195/65 R15	91V
195/65 R15 RF	95H
205/65 R15	94H
205/65 R15 RF	99H
205/65 R15	94V
215/65 R15	96V
205/65 R16	95H
215/65 R16	98H
215/65 R16	98V

175/60 R13	77H
185/60 R14	82H
195/60 R14	86H
205/60 R14	88V
185/60 R15	84H
185/60 R15 RF	88H
195/60 R15	88H
195/60 R15	88V
205/60 R15	91H
205/60 R15	91V

205/60 R16	92H
205/60 R16	92V
205/60 R16 RF	96V
185/55 R15	82V
205/55 R15	88V
195/55 R16	87V
205/55 R16	91H
205/55 R16	91V
215/55 R16	93V
205/50 R15	86V

PT515 Imperium

RF: REINFORCED



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while reducing rolling resistance significantly, which in turn, leads to less fuel consumption.

High Tech
Cap Ply Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

High driving safety, comfort and durability.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve uniformity for a smoother ride and lateral stability
at high speed cornering.

petlas

PRODUCT OVERVIEW

PT525 Progreen

Designed to be more fuel efficient with high mileage performance. Guarantees safety, durability and low rolling resistance.



ECO-FRIENDLY FUEL SAVING PERFORMANCE

■ PATTERN PROPERTIES



- High performance on both dry and wet roads with asymmetrical pattern.



- Footprint with optimized sipe/groove density ensures good rolling resistance while securing safety.



- Computer designed block array minimises road / pattern noise and provides high driving comfort.



- Fast and effective water discharge with three circular channels.





■ ALL SIZES

PT525 Progreen

175/70 R14	84T
175/70 R14 RF	88T
185/70 R14	88T
175/65 R14	82T
185/65 R14	86T
185/65 R15	88T
185/65 R15	88H
195/65 R15	91H
195/65 R15 RF	95T

195/65 R15	91V
205/65 R15	94H
185/60 R14	82H
185/60 R15	84H
185/60 R15 RF	88H
195/60 R15	88H
205/60 R16	92H
205/60 R16	92V
205/60 R16 RF	96V

215/60 R16	95V
185/55 R14	80H
185/55 R15	82V
195/55 R15	85H
195/55 R16	87H
205/55 R16	91H
195/50 R15	82H
195/50 R16	88V

RF: REINFORCED



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions while reducing rolling resistance significantly, which in turn, leads to less fuel consumption.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas

All Weather Tire

PT535 Imperium

Provides high performance on wet and dry conditions. Offers outstanding driving comfort without compromising high mileage.



EXCEPTIONAL ALL SEASON PERFORMANCE

■ PATTERN PROPERTIES



- Circumferential rib on the tread center improves handling and braking performance.



- Better grip and traction on wet road with optimized sipe density.



- Computer simulated block array minimizes road /pattern noise and enhances driving comfort.



- Four circumferential grooves provide excellent water drainage and reduce the risk of aquaplaning significantly.





■ ALL SIZES

175/70 R14	84H	185/60 R15	84H
175/65 R14	82H	185/60 R15 RF	88H
185/65 R14	86H	195/60 R15	88H
185/65 R15	88H	195/55 R16	87H
185/65 R15 RF	92H	205/55 R16	91H
195/65 R15	91H	195/50 R16	84H
195/65 R15 RF	95H	RF: REINFORCED	

PT535 Imperium



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Partial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas

PT711 Velox Sport

Designed and developed for ultra-high performance sport cars. Its aggressive pattern design and construction increase handling performance on both wet and dry roads.



URNS POWER INTO PERFORMANCE

PATTERN PROPERTIES



- Aesthetic pattern design.



- Strong shoulder blocks enable exceptional cornering performance at high speeds and provide resistance against irregular wear.



- V-shaped grooves from crown center towards the shoulder provide effective water drainage, resulting in better wet-grip.





■ SIZE

185/60 R13

80H

PT711 Velox Sport



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions while reducing rolling resistance significantly, which in turn, leads to lower fuel consumption.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas

PRODUCT OVERVIEW

PT741 Velox Sport

Produced for drivers who desire ultimate handling and grip performance without compromising comfort while driving at high speeds.



FOR THE ONES, HAVING DESIRE FOR SPEED PERFORMANCE AND COMFORT

■ PATTERN PROPERTIES



- Center block contacts the road and provides a stable and balanced drive.



- High performance on both dry and wet roads with asymmetrical pattern.



- Reinforced and wide shoulder block increases the surface amount contacting the road and enhances dry grip performance with high curving capability and maneuverability.



- Intensely designed outer side provides better grip on dry and wet roads and increases the stability of the vehicle thanks to its special canal structure.



- Minimised road / pattern noise enhances driving comfort with computer designed block array.



- Fast and effective water discharge with three circular channels.





Specially designed tread profile enables outstanding high-speed capabilities, superb handling and cornering response on dry and wet road conditions. Modern tread design and special tread compound provide fuel efficiency with exceptional durability. PT741 is developed for a wide range of vehicles from sport cars to luxury cars.

*SEE NEXT PAGE FOR ALL SIZES ⇨



TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions while reducing rolling resistance significantly, which in turn, leads to less fuel consumption.

High Tech Cap Ply Construction

Jointless "0" degree spiral Aramid-Nylon Hybrid Layer and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.



■ ALL SIZES

215/60 R16 RF	99V
225/60 R16	98V
235/60 ZR16	100W
195/55 R15	85V
185/55 R16 RF	87H
195/55 R16	87V
195/55 R16 RFT	87V
205/55 R16 RFT	91V
205/55 ZR16 RF	94W
215/55 ZR16 RF	97W
225/55 ZR16 RF	99W
205/55 ZR17 RF	95W
215/55 ZR17 RF	98W
225/55 ZR17 RF	101W
225/55 ZR17 RFT	97W
235/55 ZR17 RF	103W
235/55 ZR18 RF	104W
195/50 R15	82V
195/50 R16	84V
205/50 ZR16 RF	91W
225/50 ZR16 RF	96W
205/50 ZR17 RF	93W
205/50 ZR17 RFT	89W
215/50 ZR17 RF	95W
225/50 ZR17 RF	98W
225/50 ZR17 RFT	94W
235/50 ZR18 RF	101W
245/50 ZR18	100W
245/50 R18 RFT	100W
195/45 R16 RF	84V
205/45 ZR16 RF	87W
215/45 R16 RF	90V
205/45 ZR17 RF	88W
215/45 ZR17 RF	91W
225/45 ZR17 RF	94W
225/45 ZR17 RFT	91W
235/45 ZR17 RF	97W
245/45 ZR17 RF	99W
215/45 ZR18 RF	93W
225/45 ZR18 RF	95W
225/45 ZR18 RFT	91W
235/45 ZR18 RF	98W
245/45 ZR18 RF	100W
245/45 ZR18 RFT	96W
255/45 ZR18 RF	103W ●●
275/45 ZR18 RF	107W ●●
225/45 ZR19 RF	96W
235/45 ZR19 RF	99W

245/45 ZR19 RF	102W
245/45 ZR19 RFT	98W
255/45 ZR19 RF	104Y ●●
205/40 ZR16 RF	83W
215/40 ZR16 RF	86W
205/40 ZR17 RF	84W
215/40 ZR17 RF	87W
235/40 ZR17 RF	94W
245/40 ZR17 RF	95W
215/40 ZR18 RF	89W
215/40 R18 RFT	85Y
225/40 ZR18 RF	92Y
225/40 R18 RF RFT	92Y
235/40 ZR18 RF	95W
245/40 ZR18 RF	97W
245/40 ZR18 RFT	93W
255/40 ZR18	95W ●●
255/40 R18 RFT	95Y ●●
265/40 ZR18 RF	101Y ●●
275/40 ZR18 RF	103Y ●●
275/40 R18 RFT	99Y ●●
225/40 ZR19 RF	93W
225/40 R19 RF RFT	93Y
235/40 ZR19 RF	96Y
245/40 ZR19 RF	98W
245/40 ZR19 RFT	94W
255/40 ZR19 RF	100W ●●
265/40 ZR19 RF	102W ●●
275/40 ZR19 RF	105Y ●●
275/40 R19 RFT	101Y ●●
285/40 ZR19 RF	107W ●●
245/40 ZR20 RF	99W
245/40 R20 RF RFT	99Y
255/40 ZR20 RF	101W ●●
245/35 ZR17	87W
215/35 ZR18 RF	84W
225/35 ZR18 RF	87W
245/35 ZR18 RF	92W
245/35 R18 RFT	88Y
255/35 ZR18 RF	94Y ●●
255/35 R18 RFT	90Y ●●
265/35 ZR18 RF	97W ●●
275/35 ZR18 RF	99W ●●
275/35 R18 RFT	95Y ●●
285/35 ZR18 RF	101W ●●
285/35 R18 RFT	97Y ●●
295/35 ZR18	99Y ●●
215/35 ZR19 RF	85W

PT741 Velox Sport

225/35 ZR19 RF	88W
225/35 R19 RF RFT	88Y
235/35 ZR19 RF	91W
245/35 ZR19 RF	93W
245/35 R19 RF RFT	93Y
255/35 ZR19 RFT	92W ●●
255/35 ZR19 RF	96W ●●
265/35 ZR19 RF	98W ●●
275/35 ZR19 RF	100W ●●
275/35 R19 RF RFT	96W ●●
285/35 ZR19	99Y ●●
285/35 R19 RFT	99Y ●●
295/35 ZR19 RF	104W ●●
225/35 ZR20 RF	90Y
225/35 R20 RF RFT	90Y
245/35 ZR20 RF	95W
245/35 R20 RF RFT	95Y
255/35 ZR20 RF	97W ●●
265/35 ZR20 RF	99W ●●
275/35 ZR20 RF	102Y ●●
275/35 R20 RF RFT	102Y ●●
295/35 ZR20 RF	105W ●●
245/30 ZR19 RF	89W
255/30 ZR19 RF	91W ●●
255/30 R19 RF RFT	91Y ●●
265/30 ZR19 RF	93W ●●
275/30 ZR19 RF	96W ●●
275/30 R19 RF RFT	96W ●●
285/30 ZR19 RF	98W ●●
295/30 ZR19 RF	100W ●●
305/30 ZR19 RF	102W ●●
245/30 ZR20 RF	90Y
255/30 ZR20 RF	92Y ●●
255/30 R20 RF RFT	92Y ●●
265/30 ZR20 RF	94Y ●●
275/30 ZR20 RF	97W ●●
275/30 R20 RF RFT	97Y ●●
285/30 ZR20 RF	99W ●●
295/30 ZR20 RF	101W ●●
305/30 ZR20 RF	103W ●●

RF : REINFORCED

RFT : RUN FLAT

●● : Sizes with two rib design

All Weather Tire

PT565 Multi Action

All weather tire for a wide range of weather and road conditions. The V-shaped channels offer effective discharge of water, mud and snow. Delivers excellent driving and cornering capabilities and assures safety on both ice and snow thanks to its unique pattern design and special compound. 3PMSF and M+S markings on the tire prove better grip and braking on snowy roads.



ULTIMATE PERFORMANCE ON ALL WEATHER CONDITIONS

PATTERN PROPERTIES



■ Better grip and traction on dry, wet and snowy roads with optimized sipe density.



■ It offers superior traction and cornering safety on snowy roads thanks to its V shaped special tread pattern design.



■ Low void ratio on tread center provides driving comfort on dry road.



■ V shaped grooves with optimized width and angle provide excellent water and snow drainage.





ALL SIZES

155/70 R13	75T	205/65 R15	94H	205/55 R16	91H	195/50 R16 RF	88V	225/45 ZR18 RF	95Y
165/70 R13	79T	215/65 R16 RF	102V	205/55 R16	91V	205/50 R17 RF	93W	235/45 R18 RF	98W
175/70 R13	82T	185/60 R14	82H	205/55 R16 RF	94V	215/50 R17 RF	95W	245/45 R18 RF	100W
175/70 R14	84T	185/60 R15 RF	88H	215/55 R16 RF	97V	225/50 R17 RF	98V	225/45 R19 RF	96W
175/65 R14	82T	195/60 R15	88H	225/55 R16 RF	99W	195/45 R16 RF	84V	245/40 ZR17 RF	95Y
185/65 R14	86T	205/60 R16	92V	205/55 R17 RF	95W	215/45 R16 RF	90V	225/40 R18 RF	92W
175/65 R15	84H	215/60 R16 RF	99V	215/55 R17 RF	98W	205/45 R17 RF	88W	235/40 ZR18 RF	95Y
185/65 R15	88T	185/55 R14	80H	225/55 R17 RF	101W	215/45 ZR17 RF	91W	245/40 R18 RF	97Y
185/65 R15	88H	185/55 R15 RF	86H	235/55 ZR17 RF	103W	225/45 R17 RF	94W	235/40 ZR19 RF	96Y
195/65 R15	91H	195/55 R15	85H	195/55 R20 RF	95H	235/45 R17 RF	97W	235/35 ZR19 RF	91Y
195/65 R15 RF	95H	195/55 R16	87H	195/50 R15	82V	245/45 R17 RF	99Y	245/35 R19 RF	93Y
						225/45 R18 RF	95W	255/35 ZR19 RF	96Y

PT565 Multi Action

RF: REINFORCED



TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

Enhances durability and resistance against tread wear
while improving uniformity for a smoother ride.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve uniformity for a smoother ride and
lateral stability at high speed cornering.

Winter Tire

W601 Snow Master

High performance winter tire enabling high traction capability on icy roads thanks to its tread pattern. Cornering and handling will no longer be a problem on slippery road.



GRIP THE ROAD SAFELY IN WINTER CONDITIONS

■ PATTERN PROPERTIES



- Wide lateral grooves and circumferential blocks improve braking performance on snow and ice.



- Z-shaped multi sipes enhance handling performance.



- Minimized road / pattern noise enhances driving comfort with computer designed block array.



- Three wide circumferential grooves provide excellent water drainage and significantly reduce the risk of aquaplaning.





■ ALL SIZES

155/80 R13	79T
165/80 R13	83T
175/80 R14	88T
145/70 R13	71T
155/70 R13	75T
165/70 R13	79T
165/70 R13 RF	83T
175/70 R13	82T
185/70 R13	86T ●●
165/70 R14	81T

165/70 R14 RF	85R
175/70 R14	84T
175/70 R14 RF	88T
185/70 R14	88T ●●
195/70 R14	91T ●●
195/70 R15 RF	97T ●●
155/65 R13	73T
165/65 R13	77T
175/65 R13	80T
155/65 R14	75T

165/65 R14	79T
175/65 R14	82T
175/65 R14 RF	86T
185/65 R14	86T ●●
175/65 R15	84T
165/60 R14	75T

RF : REINFORCED

●● : Sizes with two rib design

W601 Snow Master



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas

Winter Tire

W651 Snow Master

The ideal winter tire for passenger cars which maximizes your vehicle performance on snowy and icy roads. Offers shorter braking distance and reliable handling.



ULTIMATE PERFORMANCE ON SNOWY AND ICY ROADS

■ PATTERN PROPERTIES



- Wide lateral grooves and circumferential blocks improve braking performance on snow and ice.



- Z- shaped multi sipes enhance handling performance.



- V – shaped tread design on the inner side minimizes noise and improves comfort.



- High maneuverability and bend – turning capability with outer block type base structure on the pattern.





ALL SIZES

185/65 R15	88H	185/60 R15	84H	205/55 R15	88V	225/55 R17	97H	215/45 R16 RF	90V
185/65 R15 RF	92H	195/60 R15	88H	205/55 R15 RF	92V	225/55 R17 RF	101V	205/45 R17 RF	88H
195/65 R15	91H	205/60 R15	91H	185/55 R16 RF	87H	225/55 R17 RFT	97V	215/45 R17 RF	91V
195/65 R15 RF	95H	205/60 R16	92H	195/55 R16	87H	235/55 R17 RF	103V	225/45 R17 RF	94V
205/65 R15	94H	215/60 R16	95H	205/55 R16	91H	195/50 R15	82H	235/45 R17 RF	97V
215/65 R15	96H	225/60 R16	98H	205/55 R16 RFT	91H	205/50 R15	86H	245/45 R17 RF	99V
205/65 R16	95H	235/60 R16	100H	215/55 R16	93H	195/50 R16	84H	215/45 R18 RF	93V
215/65 R16	98H	185/55 R14	80H	225/55 R16	95H	205/50 R16 RF	91H	225/45 R18 RF	95V
215/65 R16 RF	102T	185/55 R15	82H	205/55 R17	91H	225/50 R16 RF	96V	235/45 R18 RF	98V
185/60 R14	82H	195/55 R15	85H	215/55 R17 RF	98V	205/50 R17 RF	93V	245/45 R18 RF	100V
						215/50 R17	91H	245/45 R18 RF RFT	100V
						225/50 R17 RF	98V	245/45 R19 RF	102V
						215/50 R18	92V	245/40 R17 RF	95V
						245/50 R18 RF	104V	225/40 R18 RF	92V
						235/50 R19 RF	103V	235/40 R18 RF	95V
						195/45 R16 RF	84H	245/40 R18 RF	97V
						205/45 R16 RF	87H	245/40 R19 RF	98V
								255/40 R19 RF	100V



TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas

Winter Tire

W661 Glacier

Glacier W661 is specifically developed to help drivers keep moving in the harshest winter conditions where the roads are covered with snow and ice. Ensures ultimate safety by providing precise handling and short braking distance on snowy and icy road roads. Optimized profile keeps contact with the ground at even the most extreme conditions. The superior performance of W661 is proven on relentless tests in the challenging weather and road conditions of Finland.



MORE THAN MEETS THE ICE

PATTERN PROPERTIES



- Circumferential center rib ensures continuous contact with the road to provide precise steering and a balanced drive.



- Directional block structure takes performance to outstanding levels.



- V-shaped grooves effectively discharge snow and melting water to ensure maximum braking safety.



- Wavy sipes of optimized density transfer full braking power to the road, minimizing braking distance on frost-covered and icy roads.



- Multi-level block sides bite the road with their teeth to guarantee persistent lateral grip for perfection in high speed bend turns.



- Multi faceted groove bases maximize traction and grip during acceleration and brakes by grabbing the road like claws.





■ ALL SIZES

175/70 R13	82T	195/55 R16	87T
175/65 R14	82T	205/55 R16	91T
185/65 R14	86T	215/55 R16 RF	97T
185/65 R15	88T	215/55 R17 RF	98T
195/65 R15	91T	225/55 R17 RF	101T
205/65 R15	94T	215/50 R17 RF	95T
185/60 R15 RF	88T	225/50 R17 RF	98T
195/60 R15	88T	225/45 R17 RF	94T
205/60 R16	92T		
205/60 R16 RF	96T		

RF : REINFORCED

W661 Glacier



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas

ITS NOT FAR
Together



PT411



PT421



PT431



SuvMaster A/S



W671



SUV, 4 X 4 TIRES



W681



*Best Quality
Suv, 4x4 Tires*

All Weather Tire

PT411 Explero A/S

High performance 4x4-SUV tire offering reliable performance throughout the year. Shows great traction performance on any kind of road with its special compound mixture. Offers superb comfort by reducing the levels of noise and vibration.



UNIQUE FOUR SEASON PERFORMANCE

■ PATTERN PROPERTIES



- The structure of the shoulder is specifically designed for high cornering performance and makes the tire suitable to be used in all seasons.



- 4 circumferential channels provide rapid and effective water discharge.



- Stylish asymmetrical pattern design creates an impressive appearance.



- Minimised road / pattern noise enhances driving comfort with computer designed block array.



SUV, 4 X 4 TIRES



■ ALL SIZES

235/75 R15	105H
205/70 R15	96H
215/70 R15	98H
215/70 R16	100H
225/70 R16 RF	107T
235/70 R16	106H
245/70 R16	107H
255/70 R16	111T
265/70 R16	112T

215/65 R16	98H
215/65 R16 RF	102H
255/65 R16	109H
215/65 R17	99H
225/65 R17	102H
235/65 R17 RF	108H
245/65 R17 RF	111H
255/65 R17	110H
265/65 R17	112H

215/60 R16	95H
235/60 R16	100H
225/60 R17 RF	103H
255/60 R18 RF	112V

RF: REINFORCED

PT411 Explero A/S



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

Enhances durability and resistance against tread wear while
improving uniformity for a smoother ride.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve uniformity for a smoother ride and lateral
stability at high speed cornering.

petlas

PT421 Explero A/T

Developed to meet the demands of high performance SUV and 4x4 vehicles. Reliable and long lasting all terrain tire that offers outstanding braking performance.



EXCELLENT TRACTION ON ANY ROAD

■ PATTERN PROPERTIES



■ Stability on stream driving routes with circular block on the center.



■ Ultimate traction and balanced drive with reinforced block structure.



■ High grip on wet road.



■ Special shoulder design delivers better traction on sand or mud.





■ ALL SIZES

205/80 R16 RF	104T
215/80 R15	102S
235/75 R15	105T
255/70 R15	108T
265/70 R15 RF	116T
235/70 R16	106T

245/70 R16 RF	111T
215/65 R16	98T
265/65 R17 RF	116S
255/60 R18 RF	112H
265/60 R18 RF	114T

RF: REINFORCED

PT421 Explero A/T



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures ensuring superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas

PT431 Explero H/T

Premium high performance tire developed for luxury SUVs. Combines quality and high performance with excellent grip and short braking distance on every driving condition.



HIGH PERFORMANCE TIRE WITH EXCEPTIONAL COMFORT

PATTERN PROPERTIES



Center block contacts the road and provides a stable and balanced drive.



High performance on both dry and wet roads with asymmetrical pattern.



Reinforced and wide shoulder block increases the surface amount contacting the road and enhances dry grip performance with high curving capability and maneuverability.



Intensely designed outer side provides better grip on dry and wet roads and increases the stability of the vehicle thanks to its special canal structure.



Minimised road / pattern noise enhances driving comfort with computer designed block array.



Fast and effective water discharge with three circular channels.





ALL SIZES

225/65 R17	102H
235/65 R17 RF	108V
215/60 R17	96V
235/60 R17	102V
255/60 R17	106V ●●
225/60 R18	100H
235/60 R18 RF	107V
245/60 R18	105H
255/60 R18 RF	112V ●●
265/60 R18	110H ●●

265/60 R18	110V ●●
225/55 R17	97V
235/55 R17 RF	103V
215/55 R18	95H
225/55 R18	98V
235/55 R18	100V
255/55 R18 RF	109V ●●
225/55 R19	99H
235/55 R19 RF	105V
245/55 R19	103H

255/55 R19 RF	111V ●●
275/55 R19	111V ●●
255/55 ZR20 RF	110Y ●●
235/50 R18 RF	101V
235/50 ZR19 RF	103W
255/50 R19 RF	107V
255/50 ZR19 RF-RFT	107W ●●
265/50 ZR19 RF	110W ●●
255/50 ZR20 RF	109Y ●●
275/45 ZR19 RF	108W ●●

PT431 Explero H/T

285/45 R19	107V ●●
255/45 ZR20 RF	105Y ●●
275/45 ZR20 RF	110W ●●
285/45 ZR20 RF	112Y ●●
275/40 ZR20	102W ●●
275/40 R20 RF-RFT	106Y ●●

RF : REINFORCED

RFT : RUN FLAT

●● : Sizes with two rib design



TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions while reducing rolling resistance significantly, which in turn, leads to less fuel consumption.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

All Weather Tire

SuvMaster A/S

All weather tire for a wide range of weather and road conditions. The V-shaped channels offer effective discharge of water, mud and snow. Delivers excellent driving and cornering capabilities and assures safety on both ice and snow thanks to its unique pattern design and special compound. 3PMSF and M+S markings on the tire prove better grip and braking on snowy roads.



ULTIMATE PERFORMANCE ON ALL WEATHER CONDITIONS

■ PATTERN PROPERTIES



■ Better grip and traction on dry, wet and snowy roads with optimized sipe density.



■ It offers superior traction and cornering safety on snowy roads thanks to its V shaped special tread pattern design.



■ Low void ratio on tread center provides driving comfort on dry road.



■ V shaped grooves with optimized width and angle provide excellent water and snow drainage.





■ ALL SIZES

255/55 R18 109W

UNDER DEVELOPMENT SIZES

235/65 R17 RF	108W	235/55 R18 RF	104V
215/65 R17 RF	103V	225/55 R18 RF	102V
235/60 R18 RF	107W	215/55 R18 RF	99V
225/60 R18 RF	104W	235/50 R18 RF	101Y
215/60 R17 RF	100V	215/50 R18	92W
255/55 R18 RF	109Y	245/45 R19 RF	102Y
235/55 R19 RF	105W	235/45 R19 RF	99Y

RF: REINFORCED

SuvMaster A/S



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

Enhances durability and resistance against tread wear
while improving uniformity for a smoother ride.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve uniformity for a smoother ride and
lateral stability at high speed cornering.

petlas

Winter Tire

W671 Explero

Designed for high traction and grip performance on snowy and icy roads. Provides stability on dry roads with special compound. Unique pattern design enables ultimate handling and cornering performance. Reduces stopping distance on slippery roads.



PREMIUM HIGH PERFORMANCE TIRE WITH EXCEPTIONAL COMFORT

■ PATTERN PROPERTIES



- Center block contacts the road and provides a stable and balanced drive.



- High performance on both dry and wet road with asymmetrical pattern.



- Reinforced and wide shoulder block increases the road amount contacting the road and enhances dry grip performance with high curving capability and maneuverability.



- Intensely designed outer side provides better grip on dry and wet road and increases the stability of the vehicle thanks to its special canal structure.



- Minimised road / pattern noise enhances driving comfort with computer designed block array.



SUV, 4 X 4 TIRES



ALL SIZES

215/80 R15	102S
205/80 R16 RF	104T
235/75 R15 RF	109T
205/70 R15	96T
215/70 R15	98H
215/70 R16 RF	104H
225/70 R16 RF	107H
235/70 R16	106T
245/70 R16 RF	111T
255/70 R16	111T
265/70 R16	112T

215/65 R17	99H
225/65 R17 RF	106h
235/65 R17 RF	108V
245/65 R17 RF	111H
255/65 R17 RF	114H
265/65 R17 RF	116H
215/60 R17 RF	100H
225/60 R17 RF	103V
235/60 R17 RF	106H
255/60 R17 RF	110V
225/60 R18 RF	104V

235/60 R18 RF	107H
245/60 R18 RF	105H
255/60 R18 RF	112H
265/60 R18 RF	114H
235/55 R17 RF	103V
215/55 R18	95H
225/55 R18 RF	102H
235/55 R18 RF	104H
255/55 R18 RF	109V
205/55 R19 RF	97H
225/55 R19	99H
235/55 R19 RF	105V
245/55 R19	103H

255/55 R19 RF	111V
275/55 R19	111H ●●
235/50 R18 RF	101V
235/50 R19 RF	103V
255/50 R19 RF-RFT	107V
255/50 R19 RF-RFT	107V
245/50 R20	102V
265/50 R20 RF	111H
225/45 R19 RF	96V
285/45 R19 RF	111H ●●
275/45 R20 RF	110V ●●
275/40 R20 RF	106V ●●
315/35 R20 RF	110V ●●



RF : REINFORCED

RFT : RUN FLAT

●● : Sizes with two rib design

TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures ensuring superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas

Winter Tire

W681 Explero Ice

W681 Explero Ice is specifically developed to endure the most extreme road and weather conditions. Guarantees perfection in safety by providing precise handling and short braking distance even when the road is blanketed with snow or ice. The outstanding performance is affirmed on relentless testing conditions of Finland.



EXTREME PERFORMANCE FOR EXTREME CHALLENGES

■ PATTERN PROPERTIES



- Provides precise steering with its circumferential center rib that guarantees continuous contact with the road.



- Offers ultimate performance thanks to its directional block structure.



- Ensures maximum braking safety on ice and snow with effective drainage of snow and melting water.



- The perfectly arranged sipe network transfers full braking power to the road and minimizes braking distance on frost-covered and icy roads.



- Multi-level block sides provide outstanding lateral grip for perfection in high speed bend turns.



- Multi-faceted groove bases strictly grab the road to maximize traction and grip during acceleration and brakes.



SUV, 4 X 4 TIRES



■ ALL SIZES

245/70 R16 RF	111T
215/65 R16 RF	102T
215/60 R17 RF	100T

W681 Explero Ice



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures ensuring superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas



PT825



SUMMER



PT825_{plus}



SUMMER



PT835



SUMMER



LIGHT TRUCK TIRES

ITS NOT FAR
Together



PT875



PT925



PT935



PT945



PT825 Full Power

Designed for commercial light trucks, transporters and vans. Enhances cornering safety and thanks to its wear resistant special compound, offers durability.



ULTIMATE PERFORMANCE AND LONG LIFE UNDER HEAVY LOAD

■ PATTERN PROPERTIES



- High performance on dry and wet roads with Z-shaped sipes.



- Circumferential tiny groove on shoulder block provides resistance against irregular wear.



- Computer simulated pitch frequency minimises road / pattern noise and improves comfort for a quieter ride.



- Three wide circumferential grooves provide excellent water drainage and significantly reduce the risk of aquaplaning.





■ SIZE

195 R15 C 8PR 106/104R

PT825 Full Power



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

PRODUCT OVERVIEW

PT825 Full Power Plus

Radial summer tire designed with high technology. Offers high-grip performance and wear resistance thanks to its special tread compound.



ENJOY THE ROAD EVEN UNDER HEAVY LOAD

■ PATTERN PROPERTIES



- Better grip and traction on wet or dry roads with Z shape tread design.



- Special formulized tread composition provides ultimate grip on asphalt.



- Minimised road / pattern noise enhances driving comfort with computer designed block array.



- Three circumferential channels provide excellent water discharge.





ALL SIZES

5.00 R12C	8PR	83/81P
155 R12 C	8PR	88/86N
155 R13 C	8PR	90/89R
185 R14 C	8PR	102/100R
195 R14 C	8PR	106/104R
205 R14 C	8PR	109/107P
215 R14 C	8PR	112/110P
185 R15 C	8PR	103/102R
175/75 R16 C	8PR	101/99R

185/75 R16 C	8PR	104/102R
195/75 R16 C	8PR	107/105R
205/75 R16 C	8PR	110/108R
205/75 R16 C	10PR	113/111R
215/75 R16 C	8PR	113/111R
215/75 R16 C	10PR	116/114R
225/75 R16 C	8PR	118/116R
165/70 R14 C	6PR	89/87R
195/70 R15 C	8PR	104/102R

PT825 Full Power Plus

205/70 R15 C	8PR	106/104R
215/70 R15 C	8PR	109/107S
225/70 R15 C	8PR	112/110R
225/70 R15 C	10PR	116/114R
205/65 R15 C	8PR	102/100T
205/65 R16 C	8PR	107/105T
215/65 R16 C	8PR	109/107R
225/65 R16 C	8PR	112/110R
235/65 R16 C	8PR	115/113R



TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

PT835 Full Power

Safe handling in all kind of situations, even under heavy loads. Wide contact area increases stability and enhances driving performance. Offers excellent mileage, rolling resistance and safety on wet roads.



ULTIMATE SUMMER PERFORMANCE

■ PATTERN PROPERTIES



- Better grip and traction on wet or dry roads with Z shape tread design.



- Specially formulized tread composition provides ultime grip on asphalt.



- Three circumferential channels provide excellent water discharge.



- Minimised road / pattern noise enhances driving comfort with computer designed block array.





■ ALL SIZES

PT835 Full Power

205/75 R16 C	8PR	110/108R
215/75 R16 C	8PR	113/11R
215/75 R16 C	10PR	116/114R
225/70 R15 C	8PR	112/110R
215/65 R15 C	6PR	104/102T
195/65 R16 C	8PR	104/102T
205/65 R16 C	8PR	107/105T

215/65 R16 C	8PR	109/107R
235/65 R16 C	8PR	115/113R
235/65 R16 C	12PR	121/119R
285/65 R16 C	10PR	128N ●●
195/60 R16 C	6PR	99/97T

●● : Sizes with two rib design



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

*All Weather Tire***PT875 Advente**

Interlocking tread blocks offer durability. Demonstrates high performance on dry roads. Provides high resistance against wear with special shoulder structure. Multi-angle sipes offer all-season traction on every kind of roads.



MAXIMUM PERFORMANCE FOR ALL SEASONS

■ PATTERN PROPERTIES



- Unique wave shaped tread pattern provides high handling performance and short brake distance on icy and wet roads.



- With ultimate rubber repletion rate and special tread mixture, provides great wear performance on dry roads, high elasticity and grip performance in low temperatures.



- Computer simulated pitch frequency minimizes road / pattern noise improving comfort for a quieter ride.



- Ultimate water discharge with circular 3-channel structure.



- Ensures high resistance against irregular wear with special shoulder structure.





ALL SIZES

PT875 Advente

155 R12 C	8PR	88/86N
155 R13 C	8PR	90/89R
185 R14 C	8PR	102/100R
195 R14 C	8PR	106/104R
185/75 R16 C	8PR	104/102R
195/75 R16 C	8PR	107/105R
205/75 R16 C	8PR	110/108R
215/75 R16 C	8PR	113/111R
225/75 R16 C	8PR	118/116R
195/70 R15 C	8PR	104/102R

205/70 R15 C	8PR	106/104R
215/70 R15 C	8PR	109/107R
225/70 R15 C	8PR	112/110R
205/65 R15 C	8PR	102/100T
205/65 R16 C	8PR	107/105T
215/65 R16 C	8PR	109/107R
225/65 R16 C	8PR	112/110R
235/65 R16 C	8PR	115/113R



TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures ensuring superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas

All Weather Tire

PT925 Full Grip

Designed for all weather performance. Offers excellent traction in difficult conditions thanks to its V shaped special tread pattern design.



DON'T WORRY ABOUT THE LOAD IN ANY WEATHER CONDITION

■ PATTERN PROPERTIES



- Optimized shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



- Multi sipes enhance handling and braking performance.



- Computer simulated pitch frequency minimizes road/pattern noise improving comfort for quieter ride.



- Stiff shoulder blocks improve cornering and maneuverability at high speeds and ensure even wear on shoulder.



- Sharp edges on shoulder improve cornering performance.



- Wide circumferential and lateral grooves provide exceptional water drainage and reduce the risk of aquaplaning.





ALL SIZES

PT925 Full Grip

155 R12 C	8PR	88/86N	195/70 R15 C	8PR	104/102R
155 R13 C	8PR	90/89N	205/70 R15 C	8PR	106/104R
185 R14 C	8PR	102/100R	215/70 R15 C	8PR	109/107R
195 R14 C	8PR	106/104R	225/70 R15 C	8PR	112/110R
175/75 R16 C	8PR	101/99R	205/65 R15 C	8PR	102/100T
185/75 R16 C	8PR	104/102R	205/65 R16 C	8PR	107/105T
195/75 R16 C	8PR	107/105R	215/65 R16 C	8PR	109/107R
205/75 R16 C	8PR	110/108R	225/65 R16 C	8PR	112/110R
215/75 R16 C	8PR	113/111R	235/65 R16 C	8PR	115/113R
225/75 R16 C	8PR	118/116R	195/60 R16 C	6PR	99/97T



TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures ensuring superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

petlas

Winter Tire

PT935 Full Grip

Perfect winter tire for light trucks with maximum safety and outstanding grip on icy roads.



SAFETY FOR LIGHT TRUCKS ON WET, SNOWY OR ICY ROADS

■ PATTERN PROPERTIES



- Optimized shoulder width increases footprint pressure resulting in higher traction and grip on snow and ice.



- Multi sipes enhance handling and braking performance.



- Computer simulated pitch frequency minimizes road/pattern noise improving comfort for a quieter ride.



- Stiff shoulder blocks improve cornering and maneuverability even at high speeds and ensure even wear on shoulders.



- Wide circumferential and lateral grooves provide exceptional water drainage and reduce the risk of aquaplaning.





ALL SIZES

PT935 Full Grip

155 R12 C	8PR	88/86N
155 R13 C	8PR	90/89N
185 R14 C	8PR	102/100R
195 R14 C	8PR	106/104R
185/75 R16 C	8PR	104/102R
195/75 R16 C	8PR	107/105R
205/75 R16 C	10PR	113/111R
215/75 R16 C	10PR	116/114R

225/75 R16 C	8PR	118/116R
195/70 R15 C	8PR	104/102R
205/70 R15 C	8PR	106/104R
215/70 R15 C	8PR	109/107R
225/70 R15 C	8PR	112/110R
215/65 R15 C	6PR	104/102T
195/65 R16 C	8PR	104/102T
205/65 R16 C	8PR	107/105T

215/65 R16 C	8PR	109/107R
225/65 R16 C	8PR	112/110R
235/65 R16 C	8PR	115/113R
235/65 R16 C	12PR	121/119R
285/65 R16 C	10PR	128N ••
195/60 R16 C	6PR	99/97T

•• : Sizes with two rib design



TECHNOLOGY & BENEFITS

Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.

Winter Tire

PT945 Full Grip

Unique pattern design with multidirectional wavy sipes and tread compound delivers exceptional performance in winter conditions and on wet roads. 3PMSF and M+S markings on that tire prove better grip and braking on snowy roads. Three circumferential grooves offer effective discharge of water and reduce the risk of aquaplaning.



SAFETY AND MOBILITY IN WINTER CONDITIONS

■ PATTERN PROPERTIES



- Optimised shoulder width increases footprint pressure resulting in higher traction and grip on snow and ice.



- Multi sipes and block type tread pattern improve grip and braking performance.



- Computer simulated pitch frequency minimizes road/pattern noise improving comfort for a quieter ride.



- Stiff shoulder blocks improve cornering and maneuvers even at high speeds and ensure even wear on shoulders.



- Wide grooves provide exceptional water drainage and reduce the risk of aquaplaning.





■ ALL SIZES

215/75 R16	10PR	116/144R
235/65 R16	12PR	121/119R

PT945 Full Grip



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

Enhances durability and resistance against tread wear while
improving uniformity for a smoother ride.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve uniformity for a smoother ride and lateral
stability at high speed cornering.

PT311 ELEGANT

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
155/80 R12	77T	412	190	35
155/80 R13	79T	437	190	35
165/80 R13	83T	487	190	35
165/80 R13 RF	87R	545	170	41
175/80 R14	88T	560	190	35
165/80 R15	87T	545	190	35
145/70 R12	69T	325	190	36
155/70 R12	73T	365	190	36
165/70 R12	77T	412	190	36
175/70 R12	80T	450	190	36
145/70 R13	71T	345	190	36
155/70 R13	75T	387	190	36
165/70 R13	79T	437	190	36
165/70 R13 RF	83T	487	190	42
175/70 R13	82T	475	190	36
185/70 R13	86T	530	190	36
165/70 R14	81T	462	190	36
165/70 R14 RF	85R	515	170	42
175/70 R14	84T	500	190	36
175/70 R14 RF	88T	560	190	42
185/70 R14	88T	560	190	36
195/70 R14	91T	615	190	36
195/70 R15 RF	97T	730	190	42
155/65 R13	73T	365	190	36
165/65 R13	77T	412	190	36
175/65 R13	80T	450	190	36
155/65 R14	75T	387	190	36
165/65 R14	79T	437	190	36
175/65 R14	82T	475	190	36
175/65 R14 RF	86T	530	190	42
185/65 R14	86T	530	190	36
195/65 R14	89H	580	210	36
175/65 R15	84T	500	190	36
185/65 R15	88T	560	190	36
195/65 R15	91T	615	190	36
195/65 R15 RF	95T	690	190	42
165/60 R14	75T	387	190	36

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4,50B	4,00B, 5,00B	156	554	D	C	69	B
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	156	580	D	C	69	B
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	166	595	D	C	69	B
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	166	595	D	C	69	B
5J	4½J, 5½J, 6J	177	637	D	C	69	B
4½J	4J, 5J, 5½J	165	646	D	C	69	B
4,50B	3,50B, 4,00B, 5,00B	145	512	D	C	69	B
4,50B	4,00B, 5,00B	156	526	D	C	69	B
5,00B	4,00B, 4,50B, 5,50B	169	539	D	C	69	B
5,00B	4,50B, 5,50B, 6,00B	177	555	D	C	69	B
4,50B, 4½J	3,50B, 3½J, 4,00B, 4J, 5,00B, 5J	146	539	D	C	69	B
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	155	554	D	C	69	B
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	168	565	D	C	69	B
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	168	565	D	C	69	B
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	177	582	D	C	69	B
5,50B, 5½J	4,50B, 4½J, 5,00B, 5J, 6,00B, 6J	189	592	D	C	69	B
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	168	590	D	C	69	B
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	168	590	D	C	69	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	605	D	C	69	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	605	D	C	69	B
5½J	4½J, 5J, 6J	193	618	D	C	69	B
6J	5J, 5½J, 6½J	201	630	D	C	69	B
6J	5J, 5½J, 6½J	203	658	C	C	69	B
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	154	534	D	C	69	B
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	170	550	D	C	69	B
5,00B, 5J	5,50B, 5½J, 6,00B, 6J	175	560	D	C	69	B
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	155	561	D	C	69	B
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6J	170	577	D	C	69	B
5,00B, 5J	5,50B, 5½J, 6J	174	586	D	C	69	B
5,00B, 5J	5,50B, 5½J, 6J	174	586	D	C	69	B
5½J	5J, 6J, 6½J	189	602	D	C	69	B
6J	5½J, 6½J, 7J	200	613	D	C	69	B
5J	5½J, 6J	175	610	D	C	69	B
5½J	5J, 6J, 6½J	189	627	D	C	69	B
6J	5½J, 6½J, 7J	201	641	D	C	69	B
6J	5½J, 6½J, 7J	200	641	D	C	69	B
5,00B, 5J	4½J, 5½J, 6J	169	558	D	C	69	B

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

PT515 IMPERIUM

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
175/70 R13	82H	82	210	36
175/70 R14	84H	84	210	36
175/70 R14 RF	88H	88	210	42
185/70 R14	88H	88	210	36
175/65 R14	82H	82	210	36
175/65 R14 RF	86T	86	190	42
185/65 R14	86H	86	210	36
175/65 R15	84H	84	210	36
185/65 R15	88H	88	210	36
185/65 R15 RF	92H	92	210	42
195/65 R15	91H	91	210	36
195/65 R15	91V	91	240	36
195/65 R15 RF	95H	95	210	42
205/65 R15	94H	94	210	36
205/65 R15 RF	99H	99	210	42
205/65 R15	94V	94	240	36
215/65 R15	96V	96	240	36
205/65 R16	95H	95	210	36
215/65 R16	98H	98	210	36
215/65 R16	98V	98	240	36
175/60 R13	77H	77	210	36
185/60 R14	82H	82	210	36
195/60 R14	86H	86	210	36
205/60 R14	88V	88	240	36
185/60 R15	84H	84	210	36
185/60 R15 RF	88H	88	210	42
195/60 R15	88H	88	210	36
195/60 R15	88V	88	240	36
205/60 R15	91H	91	210	36
205/60 R15	91V	91	240	36
205/60 R16	92H	92	210	36
205/60 R16	92V	92	240	36
205/60 R16 RF	96V	96	240	42
185/55 R15	82V	82	240	36
205/55 R15	88V	88	240	36
195/55 R16	87V	87	240	36
205/55 R16	91H	91	210	36
205/55 R16	91V	91	240	36
215/55 R16	93V	93	240	36
205/50 R15 *	86V	86	270	36

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	179	578	C	B	70	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	605	C	B	70	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	605	C	B	70	B
5½J	4½J, 5J, 6J	189	616	C	B	70	B
5,00B, 5J	5,50B, 5½J, 6J	177	589	C	B	70	B
5,00B, 5J	5,50B, 5½J, 6J	177	589	C	B	70	B
5½J	5J, 6J, 6½J	190	600	C	B	70	B
5J	5½J, 6J	177	615	C	B	70	B
5½J	5J, 6J, 6½J	189	625	C	B	70	B
5½J	5J, 6J, 6½J	189	625	C	B	70	B
6J	5½J, 6½J, 7J	201	638	C	B	71	B
6J	5½J, 6½J, 7J	201	638	C	B	71	B
6J	5½J, 6½J, 7J	201	638	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	B
6½J	6J, 7J, 7½J	221	662	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	209	675	C	B	71	B
6½J	6J, 7J, 7½J	223	688	C	B	71	B
6½J	6J, 7J, 7½J	223	688	C	B	71	B
5J	5,00B, 5,50B, 5½J, 6,00B, 6J	174	541,5	D	B	70	B
5½J	5J, 6J, 6½J	189	582	C	B	70	B
6J	5½J, 6½J, 7J	200	593	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	204	599,5	C	B	71	B
5½J	5J, 6J, 6½J	189	609	C	B	70	B
5½J	5J, 6J, 6½J	189	609	C	B	70	B
6J	5½J, 6½J, 7J	198	622	C	B	71	B
6J	5½J, 6½J, 7J	198	622	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	209	630	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	209	630	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210	655	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210	655	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210,6	654,8	C	B	71	B
6J	5J, 5½J, 6½J	192	592	C	B	70	B
6½J	5½J, 6J, 7J, 7½J	216	609	C	B	71	B
6J	5½J, 6½J, 7J	199	625	C	B	71	B
6½J	5½J, 6J, 7J, 7½J	213	636	C	B	71	B
6½J	5½J, 6J, 7J, 7½J	213	636	C	B	71	B
7J	6J, 6½J, 7½J	226	642	C	B	71	B
6½J	5½J, 6J, 7J, 7½J	211	589	C	B	71	B

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

PT525 PROGREEN

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
175/70 R14	84T	500	190	36
175/70 R14 RF	88T	560	190	42
185/70 R14	88T	560	190	36
175/65 R14	82T	475	190	36
185/65 R14	86T	530	190	36
185/65 R15	88T	560	190	36
185/65 R15	88H	560	210	36
195/65 R15	91H	615	210	36
195/65 R15 RF	95T	690	190	42
195/65 R15	91V	615	240	36
205/65 R15	94H	670	210	36
185/60 R14	82H	475	210	36
185/60 R15	84H	500	210	36
185/60 R15 RF	88H	560	210	42
195/60 R15	88H	560	210	36
205/60 R16	92H	630	210	36
205/60 R16	92V	630	240	36
205/60 R16 RF	96V	710	240	42
215/60 R16	95V	690	240	36
185/55 R14 *	80H	450	210	36
185/55 R15 *	82V	475	240	36
195/55 R15 *	85H	515	210	36
195/55 R16 *	87H	545	210	36
205/55 R16 *	91H	615	210	36
195/50 R15 *	82H	475	210	36
195/50 R16 RF *	88V	560	240	42

*Sizes with rim guard

PT535 IMPERIUM

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
175/70 R14 *	84H	500	210	36
175/65 R14 *	82H	475	210	36
185/65 R14	86H	530	210	36
185/65 R15	88H	560	210	36
185/65 R15 RF	92H	630	210	42
195/65 R15 *	91H	615	210	36
195/65 R15 RF *	95H	690	210	42
185/60 R15 *	84H	500	210	36
185/60 R15 RF *	88H	560	210	42
195/60 R15 *	88H	560	210	36
195/55 R16 *	87H	545	210	36
205/55 R16 *	91H	615	210	36
195/50 R16 *	84H	500	210	36

*Size with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	599,5	C	C	69	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	599,5	C	C	69	B
5½J	4½J, 5J, 6J	192	613	C	C	69	B
5,00B, 5J	5,50B, 5½J, 6J	179	582	C	C	69	B
5½J	5J, 6J, 6½J	190	596	C	C	69	B
5½J	5J, 6J, 6½J	190	620	C	C	69	B
5½J	5J, 6J, 6½J	190	620	C	C	69	B
6J	5½J, 6½J, 7J	206	633	C	B	69	B
6J	5½J, 6½J, 7J	206	633	C	B	69	A
6J	5½J, 6½J, 7J	206	633	C	B	69	B
6J	5½J, 6½J, 7J, 7½J	206	646	C	B	69	B
5½J	5J, 6J, 6½J	186	574	C	C	69	B
5½J	5J, 6J, 6½J	184	603,5	C	C	69	B
5½J	5J, 6J, 6½J	184	603,5	C	C	69	B
6J	5½J, 6½J, 7J	201	615	C	B	69	B
6J	5½J, 6½J, 7J, 7½J	204	650	C	B	69	B
6J	5½J, 6½J, 7J, 7½J	204	650	C	B	69	B
6J	5½J, 6½J, 7J, 7½J	207,4	647,4	C	B	69	B
6½J	6J, 7J, 7½J	221	663	C	B	69	B
6J	5J, 5½J, 6½J	193	556	C	C	69	B
6J	5J, 5½J, 6½J	193	582	C	C	69	B
6J	5½J, 6½J, 7J	200	593	C	B	69	B
6J	5½J, 6½J, 7J	200	618	C	B	69	B
6½J	5½J, 6J, 7J, 7½J	214	632	C	B	69	B
6J	5½J, 6½J, 7J	200	573	C	B	69	B
6J	5½J, 6½J, 7J	200	598	C	B	69	A



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	602	D	B	70	B
5,00B, 5J	5,50B, 5½J, 6J	177	584	D	B	70	B
5½J	5J, 6J, 6½J	193	596	D	B	70	B
5½J	5J, 6J, 6½J	190	623	D	B	70	B
5½J	5J, 6J, 6½J	190	623	D	B	70	B
6J	5½J, 6½J, 7J	201	635	D	B	71	B
6J	5½J, 6½J, 7J	201	635	C	B	71	B
5½J	5J, 6J, 6½J	189	603	D	B	70	B
5½J	5J, 6J, 6½J	189	603	D	B	70	B
6J	5½J, 6½J, 7J	200	613	D	B	71	B
6J	5½J, 6½J, 7J	197	621	D	B	71	B
6½J	5½J, 6J, 7J, 7½J	214	632	D	B	71	B
6J	5½J, 6½J, 7J	198	602	D	B	71	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

petlas

PT711 VELOX SPORT

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
185/60 R13 *	80H	450	210	36

*Sizes with rim guard

PT741 VELOX SPORT

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
215/60 R16 RF	99V	775	240	42
225/60 R16	98V	750	240	36
235/60 ZR16	100W	800	270	36
195/55 R15 *	85V	515	240	36
185/55 R16 RF *	87H	545	210	42
195/55 R16 *	87V	545	240	36
195/55 R16 RFT *	87V	545	240	36
205/55 R16 RFT *	91V	615	240	36
205/55 ZR16 RF *	94W	670	270	42
215/55 ZR16 RF *	97W	730	270	42
225/55 ZR16 RF *	99W	775	270	42
205/55 ZR17 RF *	95W	690	270	42
215/55 ZR17 RF *	98W	750	270	42
225/55 ZR17 RF *	101W	825	270	42
225/55 ZR17 RFT *	97W	730	270	36
235/55 ZR17 RF *	103W	875	270	42
235/55 ZR18 RF *	104W	900	270	42
195/50 R15 *	82V	475	240	36
195/50 R16 *	84V	500	240	36
205/50 ZR16 RF *	91W	615	270	42
225/50 ZR16 RF *	96W	710	270	42
205/50 ZR17 RF *	93W	650	270	42
205/50 ZR17 RFT *	89W	580	270	36
215/50 ZR17 RF *	95W	690	270	42
225/50 ZR17 RF *	98W	750	270	42
225/50 ZR17 RFT *	94W	670	270	36
235/50 ZR18 RF *	101W	825	270	42
245/50 ZR18 *	100W	800	270	36
245/50 ZR18 RFT *	100W	800	270	36
195/45 R16 RF *	84V	500	240	42
205/45 ZR16 RF *	87W	545	270	42
215/45 R16 RF *	90V	600	240	42
205/45 ZR17 RF *	88W	560	270	42
215/45 ZR17 RF *	91W	615	270	42
225/45 ZR17 RF *	94W	670	270	42
225/45 ZR17 RFT *	91W	615	270	36
235/45 ZR17 RF *	97W	730	270	42
245/45 ZR17 RF *	99W	775	270	42
215/45 ZR18 RF *	93W	650	270	42
225/45 ZR18 RF *	95W	690	270	42
225/45 ZR18 RFT *	91W	615	270	36
235/45 ZR18 RF *	98W	750	270	42
245/45 ZR18 RF *	100W	800	270	42
245/45 ZR18 RFT *	96W	710	270	36
255/45 ZR18 RF *	103W	875	270	42
275/45 ZR18 RF *	107W	975	270	42
225/45 ZR19 RF *	96W	710	270	42
235/45 ZR19 RF *	99W	775	270	42
245/45 ZR19 RF *	102W	850	270	42
245/45 ZR19 RFT *	98W	750	270	36
255/45 ZR19 RF *	104Y	900	300	42
205/40 ZR16 RF *	83W	487	270	42
215/40 ZR16 RF *	86W	530	270	42
205/40 ZR17 RF *	84W	500	270	42
215/40 ZR17 RF *	87W	545	270	42
235/40 ZR17 RF *	94W	670	270	42
245/40 ZR17 RF *	95W	690	270	42
215/40 ZR18 RF *	89W	580	270	42
215/40 R18 RFT	85Y	515	300	36
225/40 ZR18 RF *	92Y	630	300	42
225/40 R18 RF RFT*	92Y	630	300	42

*Size with rim guard

TECHNICAL DATA

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,50B, 5½J	5,00B, 5J, 6,00B, 6J, 6½J	188	554	D	C	70	B



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	6J, 7J, 7½J	225	665	C	B	71	B
6½J	6J, 7J, 7½J, 8J	233	677	C	B	71	B
7J	6½J, 7½J, 8J, 8½J	240	690	C	B	71	B
6J	5½J, 6½J, 7J	200	595	D	C	71	B
6J	5J, 5½J, 6½J	191	610	D	C	70	B
6J	5½J, 6½J, 7J	201	620	D	C	71	B
6J	5½J, 6½J, 7J	201	620	D	C	71	B
6½J	5½J, 6J, 7J, 7½J	214	635	D	C	71	B
6½J	5½J, 6J, 7J, 7½J	214	632	D	C	71	B
7J	6J, 6½J, 7½J	228	642	C	B	71	B
7J	6J, 6½J, 7½J, 8J	233	654	C	B	71	B
6,5J	5½J, 6J, 7J, 7½J	217,5	652	D	C	71	B
7J	6J, 6½J, 7½J	226	668	C	B	71	B
7J	6J, 6½J, 7½J, 8J	228	688	C	B	71	B
7J	6J, 6½J, 7½J, 8J	233	680	D	B	71	B
7½J	6½J, 7J, 8J, 8½J	246	692	C	B	71	B
7½J	6½J, 7J, 8J, 8½J	246	718	C	B	71	B
6J	5½J, 6½J, 7J	196	582	D	C	71	B
6J	5½J, 6½J, 7J	195	608	D	C	71	B
6½J	5½J, 6J, 7J, 7½J	214	612	D	C	71	B
7J	6J, 6½J, 7½J, 8J	233	632	C	B	71	B
6½J	5½J, 6J, 7J, 7½J	214	638	C	C	71	B
6½J	5½J, 6J, 7J, 7½J	210	640	D	C	71	B
7J	6J, 6½J, 7½J	226	648	C	B	71	B
7J	6J, 6½J, 7½J, 8J	233	658	C	B	71	B
7J	6J, 6½J, 7½J, 8J	233	658	D	B	71	B
7½J	6½J, 7J, 8J, 8½J	245	693	C	B	71	B
7½J	7J, 8J, 8½J	245	708	D	B	71	B
7½J	7J, 8J, 8½J	245	708	D	B	71	B
6½J	6J, 7J, 7½J	195	582	D	C	71	B
7J	6½J, 7½J	206	596	D	C	71	B
7J	7½J, 8J	215	600	D	B	71	B
7J	6½J, 7½J	206	623	D	C	71	B
7J	7½J, 8J	211	627	C	B	71	B
7½J	7J, 8J, 8½J	222	642	D	B	71	B
7½J	7J, 8J, 8½J	226	636	D	B	71	B
8J	7½J, 8½J, 9J	236	650	C	B	71	B
8J	7½J, 8½J, 9J	243	652	C	B	71	B
7J	7½J, 8J	213	655	C	B	71	B
7½J	7J, 8J, 8½J	225	659	D	B	71	B
7½J	7J, 8J, 8½J	226	660	D	B	71	B
8J	7½J, 8½J, 9J	236	669	C	B	71	B
8J	7½J, 8½J, 9J	243	677	C	B	71	B
8J	7½J, 8½J, 9J	243	677	D	B	71	B
8½J	8J, 9J, 9½J	257	692	C	B	72	B
9J	8½J, 9½J, 10J, 10½J	269,8	705,6	C	B	72	B
7½J	7J, 8J, 8½J	225	693	D	B	71	B
8J	7½J, 8½J, 9J	238	694	D	B	71	B
8J	7½J, 8½J, 9J	243	703	C	B	71	B
8J	7½J, 8½J, 9J	243	703	D	B	71	B
8½J	8J, 9J, 9½J	257	718	C	B	72	B
7½J	7J, 8J	212	570	D	C	71	B
7½J	7J, 8J, 8½J	218	580	D	B	71	B
7½J	7J, 8J	216	601	D	C	71	B
7½J	7J, 8J, 8½J	218	608	D	B	71	B
8½J	8J, 9J, 9½J	241	622	D	B	71	B
8½J	8J, 9J, 9½J	246	635	D	B	71	B
7½J	7J, 8J, 8½J	217	633	D	B	71	B
7½J	7J, 8J, 8½J	223	627	D	B	71	B
8J	7½J, 8½J, 9J	233	642	D	B	71	B
8J	7½J, 8½J, 9J	233,5	633	D	B	71	B

SEE NEXT PAGE FOR THE REST OF SIZES ►

235/40 ZR18 RF *	95W	690	270	42
245/40 ZR18 RF *	97W	730	270	42
245/40 ZR18 RFT*	93W	650	270	36
255/40 ZR18 *	95W	690	270	36
255/40 R18 RF	95Y	690	300	36
265/40 ZR18 RF *	101Y	825	300	42
275/40 ZR18 RF *	103Y	875	300	42
275/40 R18 RFT	99Y	775	300	36
225/40 ZR19 RF *	93W	650	270	42
225/40 R19 RF RFT*	93Y	650	300	42
235/40 ZR19 RF *	96Y	710	300	42
245/40 ZR19 RF *	98W	750	270	42
245/40 ZR19 RFT*	94W	670	270	36
255/40 ZR19 RF *	100W	800	270	42
265/40 ZR19 RF *	102W	850	270	42
275/40 ZR19 RF *	105Y	925	300	42
275/40 R19 RFT*	101Y	825	300	36
285/40 ZR19 RF *	107W	975	270	42
245/40 ZR20 RF *	99W	775	270	42
245/40 R20 RF RFT	99Y	775	300	42
255/40 ZR20 RF *	101W	825	270	42
245/35 ZR17 *	87W	545	270	36
215/35 ZR18 RF *	84W	500	270	42
225/35 ZR18 RF *	87W	545	270	42
245/35 ZR18 RF *	92W	630	270	42
245/35 R18 RFT	88Y	560	300	36
255/35 ZR18 RF *	94Y	670	300	42
255/35 R18 RFT*	90Y	600	300	36
265/35 ZR18 RF *	97W	730	270	42
275/35 ZR18 RF *	99W	775	270	42
275/35 R18 RFT*	95Y	690	300	36
285/35 ZR18 RF *	101W	825	270	42
285/35 R18 RFT*	97Y	730	300	36
295/35 ZR18 *	99Y	775	300	36
215/35 ZR19 RF *	85W	515	270	42
225/35 ZR19 RF *	88W	560	270	42
225/35 R19 RF RFT	88Y	560	300	42
235/35 ZR19 RF *	91W	615	270	42
245/35 ZR19 RF *	93W	650	270	42
245/35 R19 RF RFT*	93Y	650	300	42
255/35 ZR19 RFT*	92W	630	270	36
255/35 ZR19 RF *	96W	710	270	42
265/35 ZR19 RF *	98W	750	270	42
275/35 ZR19 RF *	100W	800	270	42
275/35 R19 RFT*	96W	710	270	36
285/35 ZR19 *	99Y	775	300	36
285/35 R19 RFT*	99Y	775	300	36
295/35 ZR19 RF *	104W	900	270	42
225/35 ZR20 RF *	90Y	600	300	42
225/35 R20 RF RFT	90Y	600	300	42
245/35 ZR20 RF *	95W	690	270	42
245/35 R20 RF RFT	95Y	690	300	42
255/35 ZR20 RF *	97W	730	270	42
265/35 ZR20 RF *	99W	775	270	42
275/35 ZR20 RF *	102Y	850	300	42
275/35 R20 RF RFT*	102Y	850	300	42
295/35 ZR20 RF *	105W	925	270	42
245/30 ZR19 RF *	89W	580	270	42
255/30 ZR19 RF *	91W	615	270	42
255/30 R19 RF RFT	91Y	615	300	42
265/30 ZR19 RF *	93W	650	270	42
275/30 ZR19 RF *	96W	710	270	42
275/30 R19 RF RFT	96W	710	270	42
285/30 ZR19 RF *	98W	750	270	42
295/30 ZR19 RF *	100W	800	270	42
305/30 ZR19 RF *	102W	850	270	42
245/30 ZR20 RF *	90Y	600	300	42
255/30 ZR20 RF *	92Y	630	300	42
255/30 R20 RF RFT	92Y	630	300	42
265/30 ZR20 RF *	94Y	670	300	42
275/30 ZR20 RF *	97W	730	270	42
275/30 R20 RF RFT	97Y	730	300	42
285/30 ZR20 RF *	99W	775	270	42
295/30 ZR20 RF *	101W	825	270	42
305/30 ZR20 RF *	103W	875	270	42

*Size with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

8½J	8J, 9J, 9½J	241	645	D	B	71	B
8½J	8J, 9J, 9½J	248,5	657	D	B	71	B
8½J	8J, 9J, 9½J	245	662	D	B	71	B
9J	8½J, 9½J, 10J	257	660	D	B	72	B
9J	8,5J, 9,5J, 10J	262	656,5	D	B	72	B
9½J	9J, 10J, 10½J	277,4	664,9	C	B	72	B
9½J	9J, 10J, 10½J, 11J	282,5	673,8	D	B	72	B
9½J	9J, 10J, 10½J, 11J	285	673	D	B	72	B
8J	7½J, 8½J, 9J	230	663	C	B	71	B
8J	7½J, 8½J, 9J	234	660	D	B	71	B
8½J	8J, 9J, 9½J	236,5	670,7	D	B	71	B
8½J	8J, 9J, 9½J	248	683	D	B	71	B
8½J	8J, 9J, 9½J	248	682	D	B	71	B
9J	8½J, 9½J, 10J	258	692	C	B	72	B
9½J	9J, 10J, 10½J	275	690	D	B	72	B
9½J	9J, 10J, 10½J	281	697,4	C	B	72	B
9½J	9J, 10J, 10½J, 11J	285	696,5	D	B	72	B
10J	9½J, 10½J, 11J	291,5	707,9	C	B	72	A
8½J	8J, 9J, 9½J	244	710	D	B	71	B
8½J	8J, 9J, 9½J	251,5	703	D	B	71	B
9J	8½J, 9½J, 10J	257	711	D	B	72	B
8½J	8J, 9J, 9½J	243	608	D	B	71	B
7½J	7J, 8J, 8½J	216	613	D	B	71	B
8J	7½J, 8½J, 9J	227	625	D	B	71	B
8½J	8J, 9J, 9½J	242	636	D	B	71	B
8½J	8J, 9J, 9½J	248	632	D	B	71	B
9J	8½J, 9½J, 10J	257,5	635,5	D	B	72	B
9J	8½J, 9½J, 10J	257,5	631,5	D	B	72	B
9½J	9J, 10J, 10½J	268	647	C	B	72	B
9½J	9J, 10J, 10½J, 11J	270	656	D	B	72	B
9½J	9J, 10J, 10½J, 11J	278	650	D	B	72	B
9½J	10J, 10½J, 11J	291	656	C	B	72	A
10J	9½J, 10½J, 11J	290	657	D	B	72	B
10½J	10J, 11J, 11½J	301,9	661,8	D	B	72	B
7½J	7J, 8J, 8½J	217	640	D	B	71	B
8J	7½J, 8½J, 9J	231	644	D	B	71	B
8J	7½J, 8½J, 9J	233,5	641,5	D	B	71	B
8J	8½J, 9J, 9½J	236	654	D	B	71	B
8½J	8J, 9J, 9½J	241	662	D	B	71	B
8,5J	8J, 9J, 9½J	243,5	657	D	B	71	B
9J	8½J, 9½J, 10J	254	664	D	B	72	B
9J	8½J, 9½J, 10J	253	665	D	B	72	B
9½J	9J, 10J, 10½J	266	675	D	B	72	B
9½J	9J, 10J, 10½J, 11J	268	682	D	B	72	B
9½J	9J, 10J, 10½J, 11J	273	674	D	B	72	B
10J	9½J, 10½J, 11J	290,6	681,8	D	B	72	B
10J	9½J, 10½J, 11J	290	682	D	B	72	B
10½J	10J, 11J, 11½J	299,5	688,2	D	B	72	A
8J	7½J, 8½J, 9J	229,4	668,7	D	B	71	B
8J	7½J, 8½J, 9J	234	665	D	B	71	B
8½J	8J, 8½J, 9J, 9½J	243	689	D	B	71	B
8,5J	8J, 9J, 9½J	249	682,5	D	B	71	B
9J	8½J, 9½J, 10J	254	692	D	B	72	B
9½J	9J, 10J, 10½J	273,1	693,9	D	B	72	B
9½J	9J, 10J, 10½J, 11J	273	700,2	C	B	72	B
9,5J	9J, 10J, 10½J, 11J	275	699,5	D	B	72	B
10½J	10J, 11J, 11½J	300,1	714	C	B	72	A
8½J	8J, 9J	243,1	632,2	D	B	71	B
9J	8½J, 9½J	255	636,5	D	B	72	B
9J	8,5J, 9,5J	256	637	D	B	72	B
9½J	9J, 10J	266,2	645,8	D	B	72	B
9½J	9J, 10J	270,2	649,3	D	B	72	B
9½J	9J, 10J	273	649	D	B	72	B
10J	9½J, 10½J	285	658	D	B	72	A
10½J	10J, 11J	304	661	D	B	73	B
11J	10½J, 11½J	315,5	662	D	B	73	B
8½J	8J, 9J	242,4	656,9	D	B	71	B
9J	8½J, 9½J	255	663,7	D	B	72	B
9J	8½J, 9½J	256	663	D	B	72	B
9½J	9J, 10J	265,7	669	D	B	72	B
9½J	9J, 10J	270	677	D	B	72	B
9,5J	9J, 10J	273	675	D	B	72	B
10J	8J, 9J, 9½J	288	683	D	B	72	A
10½J	10J, 11J	307	685,3	D	B	73	B
11J	10½J, 11½J	315,3	687	C	B	73	B

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

PT565 MULTI ACTION

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
155/70 R13	75T	387	190	36
165/70 R13	79T	437	190	36
175/70 R13	82T	475	190	36
175/70 R14	84T	500	190	36
175/65 R14	82T	475	190	36
185/65 R14	86T	530	190	36
175/65 R15	84H	500	210	36
185/65 R15	88T	560	190	36
185/65 R15	88H	560	210	36
195/65 R15 *	91H	615	210	36
195/65 R15 RF	95H	690	210	42
205/65 R15	94H	670	210	36
215/65 R16 RF	102V	850	240	42
185/60 R14	82H	475	210	36
185/60 R15 RF	88H	560	210	42
195/60 R15	88H	560	210	36
205/60 R16	92V	630	240	36
215/60 R16 RF	99V	775	240	42
185/55 R14	80H	450	210	36
185/55 R15 RF	86H	530	210	42
195/55 R15	85H	515	210	36
195/55 R16	87H	545	210	36
205/55 R16	91H	615	210	36
205/55 R16	91V	615	240	36
205/55 R16 RF	94V	670	240	42
215/55 R16 RF	97V	730	240	42
225/55 R16 RF *	99W	775	270	42
205/55 R17 RF	95W	690	270	42
215/55 R17 RF	98W	750	270	42
225/55 R17 RF *	101W	825	270	42
235/55 ZR17 RF *	103W	875	270	42
195/55 R20 RF	95H	690	210	42
195/50 R15 *	82V	475	240	36
195/50 R16 RF *	88V	560	240	42
205/50 R17 RF *	93W	650	270	42
215/50 R17 RF *	95W	690	270	42
225/50 R17 RF *	98V	750	240	42
195/45 R16 RF *	84V	500	240	42
215/45 R16 RF *	90V	600	240	42
205/45 R17 RF *	88W	560	270	42
215/45 ZR17 RF *	91W	615	270	42
225/45 R17 RF *	94W	670	270	42
235/45 R17 RF *	97W	730	270	42
245/45 R17 RF *	99Y	775	300	42
225/45 R18 RF *	95W	690	270	42
225/45 ZR18 RF *	95Y	690	300	42
235/45 R18 RF *	98W	750	270	42
245/45 R18 RF *	100W	800	270	42
225/45 R19 RF *	96W	710	270	42
245/40 ZR17 RF *	95Y	690	300	42
225/40 R18 RF *	92W	630	270	42
235/40 ZR18 RF *	95Y	690	300	42
245/40 R18 RF	97Y	730	300	42
235/40 ZR19 RF *	96Y	710	300	42
235/35 ZR19 RF *	91Y	615	300	42
245/35 R19 RF *	93Y	650	300	42
255/35 ZR19 RF *	96Y	710	300	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4.5J	4.00B,4J,4.50B,4 1/2 J,5.00B,5J	152,4	549,1	D	C	71	B
5J	4.50B,4 1/2 J,5.00B,5J,5.50B,5 1/2 J,6.00B,6J	166,5	560,2	D	C	71	B
5J	4.50B,4 1/2 J,5.00B,5.50B,5 1/2 J,6.00B,6J	173	578	C	C	71	B
5J	4 1/2 J, 5.00B, 5.50B, 5 1/2 J, 6J	172,9	603,8	C	C	71	B
5J	5.00B, 5.50B, 5 1/2 J, 6J	174,7	583,8	C	C	71	B
5,5J	5, 6J, 6 1/2 J	187	599	C	C	71	B
5J	5 1/2 J, 6J	175	609	C	C	71	B
5,5J	5J, 6J, 6 1/2 J	187	624	C	C	71	B
5,5J	5J, 6J, 6 1/2 J	187	624	C	C	71	B
6J	5 1/2 J, 6 1/2 J, 7J	204,8	635	C	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J	204,8	635	C	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J, 7 1/2 J	205,5	646,8	C	C	72	B
6,5J	6J, 7J, 7 1/2 J	217,5	690	B	C	72	B
5,5J	5J, 6J, 6 1/2 J	184,5	582	C	C	71	B
5,5J	5J, 6J, 6 1/2 J	183,5	604,2	C	C	71	B
6J	5 1/2 J, 6J, 6 1/2 J, 7J	201,3	618,5	C	C	72	B
6J	5 1/2 J, 6J, 6 1/2 J, 7J, 7 1/2 J	208,7	652,5	C	C	72	B
6 1/2 J	6J, 6 1/2 J, 7J, 7 1/2 J	218,6	667,8	B	C	72	B
6J	5J, 5 1/2 J, 6 1/2 J	194	564	C	C	71	B
6J	5J, 5 1/2 J, 5 1/2 J	192,4	588,6	C	C	71	B
6J	5 1/2 J, 6 1/2 J, 7J	202,3	595,9	C	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J	200,6	620,4	C	C	72	B
6,5J	5 1/2 J, 6J, 7J, 7 1/2 J	209	636,3	C	C	72	B
6,5J	5 1/2 J, 6J, 7J, 7 1/2 J	209	638	C	C	72	B
6,5J	5 1/2 J, 6J, 7J, 7 1/2 J	209	638	C	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J	227,1	645	B	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J, 8J	232,8	657,9	C	C	72	B
6 1/2 J	5 1/2 J, 6J, 7J, 7 1/2 J	211,5	658,6	B	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J	220,9	672	B	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J, 8J	232,8	683	B	C	72	B
7 1/2 J	6 1/2 J, 7J, 8J, 8 1/2 J	244,1	690,7	B	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J	193,7	727,3	B	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J	195,5	576	C	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J	195,5	601,6	C	C	72	B
6 1/2 J	5 1/2 J, 6J, 7J, 7 1/2 J	208	641,7	C	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J	219,8	653,2	C	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J, 8J	231,2	657,9	B	C	72	B
6 1/2 J	6J, 7J, 7 1/2 J	193,2	583,1	C	C	72	B
7J	7J, 7 1/2 J, 8J	207,8	608	C	C	72	B
7J	6 1/2 J, 7J, 7 1/2 J	202,4	621	B	C	72	B
7J	7J, 7 1/2 J, 8J	213	626	B	C	72	B
7 1/2 J	7J, 8J, 8 1/2 J	225	632,8	C	C	72	B
8J	7 1/2 J, 8 1/2 J, 9J	236,3	651	C	C	72	B
8J	7 1/2 J, 8 1/2 J, 9J	242	651	D	C	72	B
7,5J	7J, 8J, 8 1/2 J	225	658	C	C	72	B
7,5J	7J, 8J, 8 1/2 J	225	658	C	C	72	B
8J	7 1/2 J, 8 1/2 J, 9J	238	672	B	C	72	B
8J	7 1/2 J, 8 1/2 J, 9J	242,4	679	B	C	72	B
7,5J	7J, 8J, 8 1/2 J	221,4	690,4	C	C	72	B
8,5J	8J, 9J, 9 1/2 J	245	635	C	C	72	B
8J	7 1/2 J, 8J, 8 1/2 J, 9J	228,4	635,7	C	C	72	B
8,5J	8J, 9J, 9 1/2 J	235,3	649	B	C	72	B
8,5J	8J, 9J, 9 1/2 J	244,8	657,5	B	C	72	B
8,5J	8J, 9J, 9 1/2 J	235,5	675	C	C	72	B
8,5J	8J, 9J, 9 1/2 J	238,6	651,3	C	C	72	B
8 1/2 J	8J, 9J, 9 1/2 J	238,5	662,1	C	C	72	B
9J	8 1/2 J, 9 1/2 J, 10J	253	666,2	B	C	72	B

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

W601 SNOW MASTER

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
155/80 R13	79T	437	190	35
165/80 R13	83T	487	190	35
175/80 R14	88T	560	190	35
145/70 R13	71T	345	190	36
155/70 R13	75T	387	190	36
165/70 R13	79T	437	190	36
165/70 R13 RF	83T	487	190	42
175/70 R13	82T	475	190	36
185/70 R13	86T	530	190	36
165/70 R14	81T	462	190	36
165/70 R14 RF	85R	515	170	42
175/70 R14	84T	500	190	36
175/70 R14 RF	88T	560	190	42
185/70 R14	88T	560	190	36
195/70 R14	91T	615	190	36
195/70 R15 RF	97T	730	190	42
155/65 R13	73T	365	190	36
165/65 R13	77T	412	190	36
175/65 R13	80T	450	190	36
155/65 R14	75T	387	190	36
165/65 R14	79T	437	190	36
175/65 R14	82T	475	190	36
175/65 R14 RF	86T	530	190	42
185/65 R14	86T	530	190	36
175/65 R15	84T	500	190	36
165/60 R14	75T	387	190	36

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	156	580	D	D	71	B
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	168	595	C	D	71	B
5J	4½J, 5½J, 6J	177	636	B	D	71	B
4,50B, 4½J	3,50B, 3½J, 4,00B, 4J, 5,00B, 5J	144	537	D	D	71	B
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	152	554	D	D	71	B
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	167	566	D	D	71	B
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	167	566	C	D	71	B
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	177	580	C	D	71	B
5,50B, 5½J	4,50B, 4½J, 5,00B, 5J, 6,00B, 6J	193	593	C	D	71	B
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	169	590	D	D	71	B
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	169	590	C	D	71	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	606	C	D	71	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	606	B	D	71	B
5½J	4½J, 5J, 6J	191	618	B	D	71	B
6J	5J, 5½J, 6½J	201	635	B	D	71	B
6J	5J, 5½J, 6½J	203	659	B	D	71	B
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	154	536	D	D	71	B
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	170	553	D	D	71	B
5,00B, 5J	5,50B, 5½J, 6,00B, 6J	175	560	D	D	71	B
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	155	562	D	D	71	B
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6J	172	575	D	D	71	B
5,00B, 5J	5,50B, 5½J, 6J	174	587	C	D	71	B
5,00B, 5J	5,50B, 5½J, 6J	174	587	C	D	71	B
5½J	5J, 6J, 6½J	189	602	C	D	71	B
5J	5½J, 6J	174	612	C	D	71	B
5,00B, 5J	4½J, 5½J, 6J	168	560	D	D	71	B

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

W651 SNOW MASTER

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
185/65 R15	88H	560	210	36
185/65 R15 RF	92H	630	210	42
195/65 R15	91H	615	210	36
195/65 R15 RF	95H	690	210	42
205/65 R15	94H	670	210	36
215/65 R15	96H	710	210	36
205/65 R16	95H	690	210	36
215/65 R16	98H	750	210	36
215/65 R16 RF	102T	850	190	42
185/60 R14	82H	475	210	36
185/60 R15	84H	500	210	36
195/60 R15	88H	560	210	36
205/60 R15	91H	615	210	36
205/60 R16	92H	630	210	36
215/60 R16	95H	690	210	36
225/60 R16	98H	750	210	36
235/60 R16	100H	800	210	36
185/55 R14	80H	450	210	36
185/55 R15	82H	475	210	36
195/55 R15	85H	515	210	36
205/55 R15	88V	560	240	36
205/55 R15 RF	92V	630	240	42
185/55 R16 RF *	87H	545	210	42
195/55 R16	87H	545	210	36
205/55 R16	91H	615	210	36
205/55 R16 RFT *	91H	615	210	36
215/55 R16	93H	650	210	36
225/55 R16	95H	690	210	36
205/55 R17 *	91H	615	210	36
215/55 R17 RF	98V	750	240	42
225/55 R17	97H	730	210	36
225/55 R17 RF	101V	825	240	42
225/55 R17 RFT	97V	730	240	36
235/55 R17 RF *	103V	875	240	42
195/50 R15 *	82H	475	210	36
205/50 R15 *	86H	530	210	36
195/50 R16 *	84H	500	210	36
205/50 R16 RF *	91H	615	210	42
225/50 R16 RF *	96V	710	240	42
205/50 R17 RF *	93V	650	240	42
215/50 R17 *	91H	615	210	36
225/50 R17 RF *	98V	750	240	42
215/50 R18 *	92V	630	240	36
245/50 R18 RF *	104V	900	240	42
235/50 R19 RF *	103V	875	240	42
195/45 R16 RF *	84H	500	210	42
205/45 R16 RF *	87H	545	210	42
215/45 R16 RF *	90V	600	240	42
205/45 R17 RF *	88H	560	210	42
215/45 R17 RF *	91V	615	240	42
225/45 R17 RF *	94V	670	240	42
235/45 R17 RF *	97V	730	240	42
245/45 R17 RF *	99V	775	240	42
215/45 R18 RF *	93V	650	240	42
225/45 R18 RF *	95V	690	240	42
235/45 R18 RF *	98V	750	240	42
245/45 R18 RF *	100V	800	240	42
245/45 R18 RF RFT	100V	800	240	42
245/45 R19 RF *	102V	850	240	42
245/40 R17 RF *	95V	690	240	42
225/40 R18 RF *	92V	630	240	42
235/40 R18 RF *	95V	690	240	42
245/40 R18 RF *	97V	730	240	42
245/40 R19 RF *	98V	750	240	42
255/40 R19 RF *	100V	800	240	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5½J	5J, 6J, 6½J	190	627	C	C	70	B
5½J	5J, 6J, 6½J	190	627	B	C	70	B
6J	5½J, 6½J, 7J	201	640	B	C	70	B
6J	5½J, 6½J, 7J	201	640	B	C	70	B
6J	5½J, 6½J, 7J, 7½J	207	652	B	C	70	B
6½J	6J, 7J, 7½J	221	661	B	C	70	B
6J	5½J, 6½J, 7J, 7½J	209	675	B	C	70	B
6½J	6J, 7J, 7½J	221	686	B	C	70	B
6½J	6J, 7J, 7½J	221	690	B	C	70	B
5½J	5J, 6J, 6½J	189	581	C	C	70	B
5½J	5J, 6J, 6½J	189	608	C	C	70	B
6J	5½J, 6½J, 7J	198	622	C	C	70	B
6J	5½J, 6½J, 7J, 7½J	208	631	B	C	70	B
6J	5½J, 6½J, 7J, 7½J	209	657	B	C	70	B
6½J	6J, 7J, 7½J	221	667	B	C	70	B
6½J	6J, 7J, 7½J, 8J	228	680	B	C	70	B
7J	6½J, 7½J, 8J, 8½J	241	690	B	C	70	B
6J	5J, 5½J, 6½J	192	564	C	C	70	B
6J	5J, 5½J, 6½J	191	592	C	C	70	B
6J	5½J, 6½J, 7J	195	604	C	C	70	B
6½J	5½J, 6J, 7J, 7½J	213	610	C	C	70	B
6½J	5½J, 6J, 7J, 7½J	213	610	B	C	70	B
6J	5J, 5½J, 6½J	192	615	C	C	70	B
6J	5½J, 6½J, 7J	196	629	C	C	70	B
6½J	5½J, 6J, 7J, 7½J	214	635	B	C	70	B
6½J	5½J, 6J, 7J, 7½J	215	635	D	C	70	B
7J	6J, 6½J, 7½J	226	642	C	C	70	B
7J	6J, 6½J, 7½J, 8J	230	658	B	C	70	B
6½J	5½J, 6J, 7J, 7½J	209	659	B	C	70	B
7J	6J, 6½J, 7½J	221	674	B	C	70	B
7J	6J, 6½J, 7½J, 8J	228	688	B	C	70	B
7J	6J, 6½J, 7½J, 8J	228	688	C	C	70	B
7J	6J, 6½J, 7½J, 8J	228,5	686	D	C	70	B
7½J	6½J, 7J, 8J, 8½J	240	690	B	C	70	B
6J	5½J, 6½J, 7J	196	583	C	C	70	B
6½J	5½J, 6J, 7J, 7½J	210	590	C	C	70	B
6J	5½J, 6½J, 7J	196	608	C	C	70	B
6½J	5½J, 6J, 7J, 7½J	209	614	B	C	70	B
7J	6J, 6½J, 7½J, 8J	222	640	B	C	70	B
6½J	5½J, 6J, 7J, 7½J	214	638	B	C	70	B
7J	6J, 6½J, 7½J	217	655	C	C	70	B
7J	6J, 6½J, 7½J, 8J	221	666	B	C	70	B
7J	6J, 6½J, 7½J	217	674	C	C	70	B
7½J	7J, 8J, 8½J	246	710	B	C	70	B
7½J	6½J, 7J, 8J, 8½J	237	727	B	C	70	B
6½J	6J, 7J, 7½J	195	586	C	C	70	B
7J	6½J, 7½J	203	595	C	C	70	B
7J	7½J, 8J	211	604	C	C	70	B
7J	6½J, 7½J	206	619	C	C	70	B
7J	7½J, 8J	206	633	B	C	70	B
7½J	7J, 8J, 8½J	223	642	B	C	70	B
8J	7½J, 8½J, 9J	230	648	B	C	70	B
8J	7½J, 8½J, 9J	243	661	B	C	70	B
7J	7½J, 8J	225	652	B	C	70	B
7½J	7J, 8J, 8½J	223	662	B	C	70	B
8J	7½J, 8½J, 9J	236	669	B	C	70	B
8J	7½J, 8½J, 9J	236	684	B	C	70	B
8J	7½J, 8½J, 9J	236	681,8	D	C	70	B
8J	7½J, 8½J, 9J	241	708	B	C	70	B
8½J	8J, 9J, 9½J	244	632	B	C	70	B
8J	7½J, 8½J, 9J	230	644	B	C	70	B
8½J	8J, 9J, 9½J	237	650	B	C	70	B
8½J	8J, 9J, 9½J	240	661	B	C	70	B
8½J	8J, 9J, 9½J	244	684	B	C	70	B
9J	8½J, 9½J, 10J	262	689	B	C	70	A

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

W661 GLACIER

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
175/70 R13	82T	475	190	36
175/65 R14	82T	475	190	36
185/65 R14	86T	530	190	36
185/65 R15	88T	560	190	36
195/65 R15	91T	615	190	36
205/65 R15	94T	670	190	36
185/60 R15 RF	88T	560	190	42
195/60 R15	88T	560	190	36
205/60 R16	92T	630	190	36
205/60 R16 RF	96T	710	190	42
195/55 R16	87T	545	190	36
205/55 R16	91T	615	190	36
215/55 R16 RF	97T	730	190	42
215/55 R17 RF	98T	750	190	42
225/55 R17 RF	101T	825	190	42
215/50 R17 RF	95T	690	190	42
225/50 R17 RF	98T	750	190	42
225/45 R17 RF	94T	670	190	42

PT411 EXPLERO A/S

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
235/75 R15	105H	925	210	36
205/70 R15	96H	710	210	36
215/70 R15	98H	750	210	36
215/70 R16	100H	800	210	36
225/70 R16 RF	107T	975	190	42
235/70 R16	106H	950	210	36
245/70 R16	107H	975	210	36
255/70 R16	111T	1090	190	36
265/70 R16	112T	1120	190	36
215/65 R16	98H	750	210	36
215/65 R16 RF	102H	850	210	42
255/65 R16	109H	1030	210	36
215/65 R17	99H	775	210	36
225/65 R17	102H	850	210	36
235/65 R17 RF	108H	1000	210	42
245/65 R17 RF	111H	1090	210	42
255/65 R17	110H	1060	210	36
265/65 R17	112H	1120	210	36
215/60 R16	95H	690	210	36
235/60 R16	100H	800	210	36
225/60 R17 RF	103H	875	210	42
255/60 R18 RF	112V	1120	240	42

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5J	4.50B, 4 1/2J, 5.00B, 5.50B, 5 1/2J, 6.00B, 6J	180	574	C	D	70	B
5J	5.00B, 5.50B, 5 1/2J, 6J	178,5	583	C	D	70	B
5 1/2J	5J, 6J, 6 1/2J	188,1	599,4	C	D	70	B
5 1/2J	5J, 6J, 6 1/2J	184,3	623,3	C	D	70	B
6J	5 1/2J, 6 1/2J, 7J	199,7	635,3	B	D	70	B
6J	5 1/2J, 6 1/2J, 7J, 7 1/2J	209,9	649,7	B	C	70	B
5 1/2J	5J, 6J, 6 1/2J	184	603,5	B	D	70	B
6J	5 1/2J, 6 1/2J, 7J	202,2	613,1	C	D	70	B
6J	5 1/2J, 6 1/2J, 7J, 7 1/2J	205,6	656	B	C	70	B
6J	5 1/2J, 6 1/2J, 7J, 7 1/2J	207,3	656,4	B	C	70	B
6J	5 1/2J, 6 1/2J, 7J	201,8	619,4	C	D	70	B
6,5J	5 1/2J, 6J, 7J, 7 1/2J	212,5	630	C	C	70	B
7J	6J, 6 1/2J, 7 1/2J	224,7	647,8	B	C	72	B
7J	6J, 6 1/2J, 7 1/2J	221,6	674,2	B	C	72	B
7J	6J, 6 1/2J, 7 1/2J, 8J	231,1	682,8	B	C	72	B
7J	6J, 6 1/2J, 7 1/2J	224	647	B	C	72	B
7J	6J, 6 1/2J, 7 1/2J, 8J	229,9	657	B	C	72	B
7 1/2J	7J, 8J, 8 1/2J	226,9	634,4	C	C	72	B



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6 1/2J	6J, 7J, 7 1/2J, 8J	241	728	C	D	71	B
6J	5J, 5 1/2J, 6 1/2J, 7J	209	674	C	D	71	B
6 1/2J	5 1/2J, 6J, 7J	229	680	C	D	71	B
6 1/2J	5 1/2J, 6J, 7J	229	705	C	D	71	B
6 1/2J	6J, 7J, 7 1/2J	234	719	C	D	71	B
7J	6J, 6 1/2J, 7 1/2J, 8J	246	731	C	D	71	B
7J	6 1/2J, 7 1/2J, 8J	248	750	C	D	71	B
7 1/2J	6 1/2J, 7J, 8J, 8 1/2J	260	764	C	D	72	B
8J	7J, 7 1/2J, 8 1/2J, 9J	272	778	C	D	72	B
6 1/2J	6J, 7J, 7 1/2J	224	689	C	D	71	B
6 1/2J	6J, 7J, 7 1/2J	224	689	C	D	71	B
7 1/2J	7J, 8J, 8 1/2J, 9J	264	734	C	D	72	B
6 1/2J	6J, 7J, 7 1/2J	222	712	C	D	71	B
6 1/2J	6J, 7J, 7 1/2J, 8J	230	724	C	D	71	B
7J	6 1/2J, 7 1/2J, 8J, 8 1/2J	240	739	C	D	71	B
7J	7 1/2J, 8J, 8 1/2J	247	748	C	D	71	B
7 1/2J	7J, 8J, 8 1/2J, 9J	263	761	C	D	72	B
8J	7 1/2J, 8 1/2J, 9J, 9 1/2J	276	773	C	D	72	B
6 1/2J	6J, 7J, 7 1/2J	222	662	C	D	71	B
7J	6 1/2J, 7 1/2J, 8J, 8 1/2J	241	684	C	D	71	B
6 1/2J	6J, 7J, 7 1/2J, 8J	228	703	C	D	71	B
7 1/2J	7J, 8J, 8 1/2J, 9J	257,6	763,6	B	D	72	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

petlas

PT421 EXPLERO A/T

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
205/80 R16 RF *	104T	900	190	42
215/80 R15 *	102S	850	180	35
235/75 R15 *	105T	925	190	36
255/70 R15 *	108T	1000	190	36
265/70 R15 RF *	116T	1250	190	42
235/70 R16 *	106T	950	190	36
245/70 R16 RF *	111T	1090	190	42
215/65 R16 *	98T	750	190	36
265/65 R17 RF *	116S	1250	180	42
255/60 R18 RF *	112H	1120	210	42
265/60 R18 RF *	114T	1180	190	42

*Sizes with rim guard

PT431 EXLERO H/T

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
225/65 R17 *	102H	850	210	36
235/65 R17 RF	108V	1000	240	42
215/60 R17 *	96V	710	240	36
235/60 R17 *	102V	850	240	36
255/60 R17 *	106V	950	240	36
225/60 R18 *	100H	800	210	36
235/60 R18 RF *	107V	975	240	42
245/60 R18 *	105H	925	210	36
255/60 R18 RF *	112V	1120	240	42
265/60 R18 *	110H	1060	210	36
265/60 R18 *	110V	1060	240	36
225/55 R17 *	97V	730	240	36
235/55 R17 RF *	103V	875	240	42
215/55 R18 *	95H	690	210	36
225/55 R18 *	98V	750	240	36
235/55 R18 *	100V	800	240	36
255/55 R18 RF *	109V	1030	240	42
225/55 R19 *	99H	775	210	36
235/55 R19 RF *	105V	925	240	42
245/55 R19 *	103H	875	210	36
255/55 R19 RF *	111V	1090	240	42
275/55 R19 *	111V	1090	240	36
255/55 ZR20 RF *	110Y	1060	300	42
235/50 R18 RF *	101V	825	240	42
235/50 ZR19 RF *	103W	875	270	42
255/50 R19 RF *	107V	975	240	42
255/50 ZR19 RF RFT *	107W	975	270	42
265/50 ZR19 RF *	110W	1060	270	42
255/50 ZR20 RF *	109Y	1030	300	42
275/45 ZR19 RF *	108W	1000	270	42
285/45 R19 *	107V	975	240	36
255/45 ZR20 RF *	105Y	925	300	42
275/45 ZR20 RF *	110W	1060	270	42
285/45 ZR20 RF *	112Y	1120	300	42
275/40 ZR20 *	102W	850	270	36
275/40 R20 RF RFT *	106Y	950	300	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5½J	5J, 6J, 6½J, 7J	209	727	D	D	71	B
6J	5½J, 6½J, 7J	218	728	D	D	71	B
6½J	6J, 7J, 7½J, 8J	244	726	D	D	71	B
7½J	6½J, 7J, 8J, 8½J	271	732	D	D	72	B
8J	7J, 7½J, 8½J, 9J	273	746	D	D	73	B
7J	6J, 6½J, 7½J, 8J	241	731	D	D	71	B
7J	6½J, 7½J, 8J	248	750	D	D	71	B
6½J	6J, 7J, 7½J	228	678	D	D	71	B
8J	7½J, 8½J, 9J, 9½J	271,2	770,9	D	D	73	B
7½J	7J, 8J, 8½J, 9J	253,1	762	D	D	72	B
8J	7½J, 8½J, 9J, 9½J	263	773	D	D	73	B



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	6J, 7J, 7½J, 8J	226,6	724,5	C	C	71	B
7J	6½J, 7½J, 8J, 8½J	240	738	B	C	71	B
6½J	6J, 7J, 7½J	221	690	C	C	71	B
7J	6½J, 7½J, 8J, 8½J	240	714	C	C	71	B
7½J	7J, 8J, 8½J, 9J	260	736	C	C	72	B
6½J	6J, 7J, 7½J, 8J	228	727	C	C	71	B
7J	6½J, 7½J, 8J, 8½J	240	739	B	C	71	B
7J	7½J, 8J, 8½J	248	751	B	C	71	B
7½J	7J, 8J, 8½J, 9J	261	763	B	C	72	B
8J	7½J, 8½J, 9J, 9½J	272	775	B	C	72	B
8J	7½J, 8½J, 9J, 9½J	272	775	B	C	72	B
7J	6J, 6½J, 7½J, 8J	233	680	C	C	71	B
7½J	6½J, 7J, 8J, 8½J	245	690	C	C	71	B
7J	6J, 6½J, 7½J	226	693	C	C	71	B
7J	6J, 6½J, 7½J, 8J	233	705	C	C	71	B
7½J	6½J, 7J, 8J, 8½J	245	715	C	C	71	B
8J	7J, 7½J, 8½J, 9J	262	735	B	C	72	B
7J	6J, 6½J, 7½J, 8J	233	731	C	C	71	B
7½J	6½J, 7J, 8J, 8½J	245	741	C	C	71	B
7½J	7J, 8J, 8½J	253	753	C	C	71	B
8J	7J, 7½J, 8½J, 9J	260	761	C	C	72	B
8½J	7½J, 8J, 9J, 9½J	283	783	C	C	72	B
8J	7J, 7½J, 8½J, 9J	262,6	791	B	C	72	B
7½J	6½J, 7J, 8J, 8½J	240	688	B	C	71	B
7½J	6½J, 7J, 8J, 8½J	238,9	722,9	C	C	71	B
8J	7J, 7½J, 8½J, 9J	265	739	B	C	72	B
8J	7J, 7½J, 8½J, 9J	258	745	C	C	72	B
8½J	7½J, 8J, 9J, 9½J	277	749	B	C	72	B
8J	7J, 7½J, 8½J, 9J	259,4	769	B	C	72	B
9J	8½J, 9,5J, 10J, 10½J	268	731	C	C	72	B
9½J	9J, 10J, 10½J	283	740	C	C	72	B
8½J	8J, 9J, 9½J	253,6	742,9	C	C	72	B
9J	8½J, 9,5J, 10J, 10½J	270	758	B	C	72	B
9½J	9J, 10J, 10½J	280,8	759,2	B	C	72	A
9½J	9J, 10J, 10½J, 11J	273	729	D	C	72	B
9½J	9J, 10J, 10½J, 11J	276,5	724,5	D	C	72	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

petlas

SuvMaster A/S

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
255/55 R18*	109W	1030	270	42

W671 EXPLERO WINTER

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
215/80 R15	102S	850	180	35
205/80 R16 RF	104T	900	190	41
235/75 R15 RF	109T	1030	190	42
205/70 R15	96T	710	190	36
215/70 R15	98H	750	210	36
215/70 R16 RF	104H	900	210	42
225/70 R16 RF	107H	975	210	42
235/70 R16	106T	950	190	36
245/70 R16 RF	111T	1090	190	42
255/70 R16	111T	1090	190	36
265/70 R16	112T	1120	190	36
215/65 R17	99H	775	210	36
225/65 R17 RF	106h	950	210	42
235/65 R17 RF	108V	1000	240	42
245/65 R17 RF	111H	1090	210	42
255/65 R17 RF	114H	1180	210	42
265/65 R17 RF	116H	1250	210	42
215/60 R17 RF	100H	800	210	42
225/60 R17 RF	103V	875	240	42
235/60 R17 RF	106H	950	210	42
255/60 R17 RF	110V	1060	240	42
225/60 R18 RF	104V	900	240	42
235/60 R18 RF	107H	975	210	42
245/60 R18 RF	105H	925	210	36
255/60 R18 RF	112H	1120	210	42
265/60 R18 RF *	114H	1180	210	42
235/55 R17 RF *	103V	875	240	42
215/55 R18 *	95H	690	210	36
225/55 R18 RF *	102H	850	210	42
235/55 R18 RF *	104H	900	210	42
255/55 R18 RF *	109V	1030	240	42
205/55 R19 RF *	97H	730	210	42
225/55 R19 *	99H	775	210	36
235/55 R19 RF *	105V	925	240	42
245/55 R19 *	103H	875	210	36
255/55 R19 RF *	111V	1090	240	42
275/55 R19 *	111H	1090	210	36
235/50 R18 RF *	101V	825	240	42
235/50 R19 RF *	103V	875	240	42
255/50 R19 RF *	107V	975	240	42
255/50 R19 RF RFT*	107V	975	240	42
245/50 R20 *	102V	850	240	36
265/50 R20 RF *	111H	1090	210	42
225/45 R19 RF *	96V	710	240	42
285/45 R19 RF *	111H	1090	210	42
275/45 R20 RF *	110V	1060	240	42
275/40 R20 RF *	106V	950	240	42
315/35 R20 RF *	110V	1060	240	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
8J	7J, 7½J, 8½J, 9J	258,7	746,1	B	C	72	B



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5½J, 6½J, 7J	218	728	B	C	70	B
5½J	5J, 6J, 6½J, 7J	209	728	B	C	70	B
6½J	6J, 7J, 7½J, 8J	235	732	B	C	70	B
6J	5J, 5½J, 6½J, 7J	212	667	B	C	70	B
6½J	5½J, 6J, 7J	225	680	B	C	70	B
6½J	5½J, 6J, 7J	224	710	B	C	70	B
6½J	6J, 7J, 7½J	233	724	B	C	70	B
7J	6J, 6½J, 7½J, 8J	240	736	B	C	70	B
7J	6½J, 7½J, 8J	248	750	B	C	70	B
7½J	6½J, 7J, 8J, 8½J	260	764	B	C	71	B
8J	7J, 7½J, 8½J, 9J	272	778	B	C	71	B
6½J	6J, 7J, 7½J	218	711	B	C	70	B
6½J	6J, 7J, 7½J, 8J	229	726	B	C	70	B
7J	6½J, 7½J, 8J, 8½J	240	738	B	C	70	B
7J	7½J, 8J, 8½J	243	752	B	C	70	B
7½J	7J, 8J, 8½J, 9J	260	762	B	C	71	B
8J	7½J, 8½J, 9J, 9½J	273	774	B	C	71	B
6½J	6J, 7J, 7½J	217	694	B	C	70	B
6½J	6J, 7J, 7½J, 8J	227	706	B	C	70	B
7J	6½J, 7½J, 8J, 8½J	240	717	B	C	70	B
7½J	7J, 8J, 8½J, 9J	260	738	B	C	71	B
6½J	6J, 7J, 7½J, 8J	228	735	B	C	70	B
7J	6½J, 7½J, 8J, 8½J	240	744	B	C	70	B
7J	7½J, 8J, 8½J	255	755	B	C	70	B
7½J	7J, 8J, 8½J, 9J	260	766	B	C	71	B
8J	7½J, 8½J, 9J, 9½J	272	775	B	C	71	B
7½J	6½J, 7J, 8J, 8½J	244	694	B	C	70	B
7J	6J, 6½J, 7½J	222	699	B	C	70	B
7J	6J, 6½J, 7½J, 8J	228	711	B	C	70	B
7½J	6½J, 7J, 8J, 8½J	244	721	B	C	70	B
8J	7J, 7½J, 8½J, 9J	261	743	B	C	71	B
6½J	5½J, 6J, 7J, 7½J	214	711	B	C	70	B
7J	6J, 6½J, 7½J, 8J	230	732	B	C	70	B
7½J	6½J, 7J, 8J, 8½J	250	741	B	C	70	B
7½J	7J, 8J, 8½J	248	753	B	C	70	B
8J	7J, 7½J, 8½J, 9J	262	765	B	C	71	B
8½J	7½J, 8J, 9J, 9½J	283	785	B	C	73	B
7½J	6½J, 7J, 8J, 8½J	238	698	B	C	70	B
7½J	6½J, 7J, 8J, 8½J	245	719	B	C	70	B
8J	7J, 7½J, 8½J, 9J	258	748	B	C	71	B
8J	7J, 7½J, 8½J, 9J	265	739	C	C	71	B
7½J	7J, 8J, 8½J	255	755	B	C	70	B
8½J	7½J, 8J, 9J, 9½J	277	774	B	C	71	B
7½J	7J, 8J, 8½J	227	688	B	C	70	B
9½J	9J, 10J, 10½J	285	739	B	C	73	B
9J	8½J, 9½J, 10J, 10½J	266	760	B	C	73	B
9½J	9J, 10J, 10½J, 11J	278	728	B	C	73	B
11J	10½J, 11½J, 12J, 12½J	316	725	B	B	73	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

petlas

W681 EXPLERO ICE

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi)
245/70 R16 RF	111T	1090	190	42
215/65 R16 RF	102T	850	190	42
215/60 R17 RF	100T	800	190	42

PT825 FULL POWER

		LOAD CAPACITY (kg)		
TIRE SIZE	PR	LOAD / SPEED INDEX	2 / 4 WHEELED MAXIMUM LOAD PER AXLE (kg)	SPEED LIMIT(km/h)
195 R15 C	8PR	106/104R	1900 / 3600	170

PT825 FULL POWER PLUS

		LOAD CAPACITY (kg)		
TIRE SIZE	PR	LOAD / SPEED INDEX	2 / 4 WHEELED MAXIMUM LOAD PER AXLE (kg)	SPEED LIMIT(km/h)
5.00 R12C	8PR	83/81P	974 / 1848	150
155 R12 C	8PR	88/86N	1120 / 2120	140
155 R13 C	8PR	90/89R	1200 / 2320	170
185 R14 C	8PR	102/100R	1700 / 3200	170
195 R14 C	8PR	106/104R	1900 / 3600	170
205 R14 C	8PR	109/107P	2060 / 3900	150
215 R14 C	8PR	112/110P	2240 / 4240	150
185 R15 C	8PR	103/102R	1750 / 3400	170
175/75 R16 C	8PR	101/99R	1650 / 3100	170
185/75 R16 C	8PR	104/102R	1800 / 3400	170
195/75 R16 C	8PR	107/105R	1950 / 3700	170
205/75 R16 C	8PR	110/108R	2120 / 4000	170
205/75 R16 C	10PR	113/111R	2300 / 4360	170
215/75 R16 C	8PR	113/111R	2300 / 4360	170
215/75 R16 C	10PR	116/114R	2500 / 4720	170
225/75 R16 C	8PR	118/116R	2640 / 5000	170
165/70 R14 C	6PR	89/87R	1160 / 2180	170
195/70 R15 C	8PR	104/102R	1800 / 3400	170
205/70 R15 C	8PR	106/104R	1900 / 3600	170
215/70 R15 C	8PR	109/107S	2060 / 3900	180
225/70 R15 C	8PR	112/110R	2240 / 4240	170
225/70 R15 C	10PR	116/114R	2500 / 4720	170
205/65 R15 C	8PR	102/100T	1700 / 3200	190
205/65 R16 C	8PR	107/105T	1950 / 3700	190
215/65 R16 C	8PR	109/107R	2060 / 3900	170
225/65 R16 C	8PR	112/110R	2240 / 4240	170
235/65 R16 C	8PR	115/113R	2430 / 4600	170

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
7J	6½J, 7½J, 8J	248	749	B	C	72	B
6.5J	6J, 7J, 7½J	226	684,5	B	C	72	B
6.5J	6J, 7J, 7½J	217	694	C	C	72	B



RIM			INFLATED DIMENSION		EU TIRE LABEL			
INFLATED PRESSURE(Psi/Bar)	RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
65	5½J	5J, 6J	196	691	D	A	72	B



RIM			INFLATED DIMENSION		EU TIRE LABEL			
INFLATED PRESSURE(Psi/Bar)	RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
65	3½J	3½J	141	565	D	B	71	B
65	4½J	4,00B, 4,50B, 4J, 5J	155	552	D	B	72	B
65	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	154	573	D	B	72	B
65	5½J	5J, 6J	185	650	D	A	72	B
65	5½J	5J, 6J	200	669	D	A	72	B
65	6J	5½J, 6½J	208	684	D	A	72	B
65	6J	5½J, 6½J, 7J	219	699	D	A	72	B
65	5½J	5J, 6J	186	675	D	A	72	B
69	5J	4½J, 5½J,	170	668	D	A	72	B
69	5J	5½J, 6J	180	684	D	A	72	B
69	5½J	5J, 6J	192	698	C	A	72	B
69	5½J	6J, 6½J	200	712	D	A	72	B
76	5½J	6J, 6½J	200	712	D	A	72	B
69	6J	5½J, 6½J, 7J	216	734	C	A	72	B
76	6J	5½J, 6½J, 7J	216	734	D	A	72	B
76	6J	6½J, 7J	224	740	D	A	72	B
54	5J	4½J	167	592	D	B	72	B
65	6J	5J, 5½J	196	651	D	A	72	B
65	6J	5½J, 6½J	206	668	D	A	72	B
65	6½J	5½J, 6J, 7J	222	679	D	A	72	B
65	6½J	6J, 7J	225	696	D	A	72	B
80	6½J	6J, 7J	225	696	D	A	72	B
54	6J	5½J, 6½J	206	650	D	A	72	B
69	6J	5½J, 6½J	206	677	D	A	71	B
69	6½J	6J, 7J	219	684	D	A	72	B
69	6½J	6J, 7J	223	702	D	A	72	B
69	7J	6½J, 7½J	238	717	D	A	72	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

petlas

PT835 FULL POWER

TIRE SIZE	PR	LOAD / SPEED INDEX	LOAD CAPACITY(kg)	
			2 / 4 WHEELED MAXIMUM LOAD PER AXLE (kg)	SPEED LIMIT(km/h)
205/75 R16 C	8PR	110/108R	2120 / 4000	170
215/75 R16 C	8PR	113/11R	2300 / 4360	170
215/75 R16 C	10PR	116/114R	2500 / 4720	170
225/70 R15 C	8PR	112/110R	2240 / 4240	170
215/65 R15 C	6PR	104/102T	1800 / 3400	190
195/65 R16 C	8PR	104/102T	1800 / 3400	190
205/65 R16 C	8PR	107/105T	1950 / 3700	190
215/65 R16 C	8PR	109/107R	2060 / 3900	190
235/65 R16 C	8PR	115/113R	2430 / 4600	170
235/65 R16 C	12PR	121/119R	2900 / 5440	170
285/65 R16 C	10PR	128N	3600 / -	140
195/60 R16 C	6PR	99/97T	1550 / 2920	190

PT875 ADVENTE

TIRE SIZE	PR	LOAD / SPEED INDEX	LOAD CAPACITY(kg)	
			2 / 4 WHEELED MAXIMUM LOAD PER AXLE (kg)	SPEED LIMIT(km/h)
155 R12 C	8PR	88/86N	1120 / 2120	140
155 R13 C	8PR	90/89R	1200 / 2320	170
185 R14 C	8PR	102/100R	1700 / 3200	170
195 R14 C	8PR	106/104R	1900 / 3600	170
185/75 R16 C	8PR	104/102R	1800 / 3400	170
195/75 R16 C	8PR	107/105R	1950 / 3700	170
205/75 R16 C	8PR	110/108R	2120 / 4000	170
215/75 R16 C	8PR	113/111R	2300 / 4360	170
225/75 R16 C	8PR	118/116R	2640 / 5000	170
195/70 R15 C	8PR	104/102R	1800 / 3400	170
205/70 R15 C	8PR	106/104R	1900 / 3600	170
215/70 R15 C	8PR	109/107R	2060 / 3900	170
225/70 R15 C	8PR	112/110R	2240 / 4240	170
205/65 R15 C	8PR	102/100T	1700 / 3200	190
205/65 R16 C	8PR	107/105T	1950 / 3700	190
215/65 R16 C	8PR	109/107R	2060 / 3900	170
225/65 R16 C	8PR	112/110R	2240 / 4240	170
235/65 R16 C	8PR	115/113R	2430 / 4600	170

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
	RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
69	5½J	6J, 6½J	201	709	C	A	71	B
69	6J	5½J, 6½J, 7J	216	728	C	A	71	B
76	6J	5½J, 6½J, 7J	213	723	C	A	71	B
65	6½J	6J, 7J	227	694	C	A	72	B
54	6½J	6J, 7J	218	660	C	A	71	B
69	6J	5½J	201	660	C	A	71	B
69	6J	5½J, 6½J	205	674	C	A	71	B
69	6½J	6J, 7J	218	682	C	A	71	B
69	7J	6½J, 7½J	240	716	C	A	72	B
83	7J	6½J, 7½J	240	716	C	A	72	B
76	8½J	8J, 9J	298	777	D	A	69	A
54	6J	5½J, 6½J	201	645	C	A	71	B



INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
	RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
65	4½J	4,00B, 4,50B, 4J, 5J	157	550	D	A	71	B
65	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	D	A	71	B
65	5½J	5J, 6J	188	650	D	A	71	B
65	5½J	5J, 6J	198	666	C	A	71	B
69	5J	5½J, 6J	184	685	D	A	71	B
69	5½J	5j, 6J	196	699	C	A	71	B
69	5½J	6J, 6½J	203	715	C	A	71	B
69	6J	5½J, 6½J, 7J	216	729	C	A	71	B
76	6J	6½J, 7J	223	744	C	A	71	B
65	6J	5J, 5½J	201	655	D	A	71	B
65	6J	5½J, 6½J	209	669	C	A	71	B
65	6½J	5½J, 6J, 7J	221	683	C	A	71	B
65	6½J	6J, 7J	228	697	C	A	71	B
54	6J	5½J, 6½J	209	647	D	A	71	B
69	6J	5½J, 6½J	209	673	C	A	71	B
69	6½J	6J, 7J	221	686	C	A	71	B
69	6½J	6J, 7J	228	699	C	A	71	B
69	7J	6½J, 7½J	240	712	B	A	71	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

petlas

PT925 FULL GRIP

TIRE SIZE	PR	LOAD / SPEED INDEX	LOAD CAPACITY (kg)	
			2 / 4 WHEELED MAXIMUM LOAD PER AXLE (kg)	SPEED LIMIT(km/h)
155 R12 C	8PR	88/86N	1120 / 2120	140
155 R13 C	8PR	90/89N	1200 / 2320	140
185 R14 C	8PR	102/100R	1700 / 3200	170
195 R14 C	8PR	106/104R	1900 / 3600	170
175/75 R16 C	8PR	101/99R	1650 / 3100	170
185/75 R16 C	8PR	104/102R	1800 / 3400	170
195/75 R16 C	8PR	107/105R	1950 / 3700	170
205/75 R16 C	8PR	110/108R	2120 / 4000	170
215/75 R16 C	8PR	113/111R	2300 / 4360	170
225/75 R16 C	8PR	118/116R	2640 / 5000	170
195/70 R15 C	8PR	104/102R	1800 / 3400	170
205/70 R15 C	8PR	106/104R	1900 / 3600	170
215/70 R15 C	8PR	109/107R	2060 / 3900	170
225/70 R15 C	8PR	112/110R	2240 / 4240	170
205/65 R15 C	8PR	102/100T	1700 / 3200	190
205/65 R16 C	8PR	107/105T	1950 / 3700	190
215/65 R16 C	8PR	109/107R	2060 / 3900	170
225/65 R16 C	8PR	112/110R	2240 / 4240	170
235/65 R16 C	8PR	115/113R	2430 / 4600	170
195/60 R16 C	6PR	99/97T	1550 / 2920	190

PT935 FULL GRIP

TIRE SIZE	PR	LOAD / SPEED INDEX	LOAD CAPACITY (kg)	
			2 / 4 WHEELED MAXIMUM LOAD PER AXLE (kg)	SPEED LIMIT(km/h)
155 R12 C	8PR	88/86N	1120 / 2120	140
155 R13 C	8PR	90/89N	1200 / 2320	140
185 R14 C	8PR	102/100R	1700 / 3200	170
195 R14 C	8PR	106/104R	1900 / 3600	170
185/75 R16 C	8PR	104/102R	1800 / 3400	170
195/75 R16 C	8PR	107/105R	1950 / 3700	170
205/75 R16 C	10PR	113/111R	2300 / 4360	170
215/75 R16 C	10PR	116/114R	2500 / 4720	170
225/75 R16 C	8PR	118/116R	2640 / 5000	170
195/70 R15 C	8PR	104/102R	1800 / 3400	170
205/70 R15 C	8PR	106/104R	1900 / 3600	170
215/70 R15 C	8PR	109/107R	2060 / 3900	170
225/70 R15 C	8PR	112/110R	2240 / 4240	170
215/65 R15 C	6PR	104/102T	1800 / 3400	190
195/65 R16 C	8PR	104/102T	1800 / 3400	190
205/65 R16 C	8PR	107/105T	1950 / 3700	190
215/65 R16 C	8PR	109/107R	2060 / 3900	170
225/65 R16 C	8PR	112/110R	2240 / 4240	170
235/65 R16 C	8PR	115/113R	2430 / 4600	170
235/65 R16 C	12PR	121/119R	2900 / 5440	170
285/65 R16 C	10PR	128N	3600 / -	140
195/60 R16 C	6PR	99/97T	1550 / 2920	190

PT945 FULL GRIP

TIRE SIZE	PR	LOAD / SPEED INDEX	LOAD CAPACITY (kg)	
			2 / 4 WHEELED MAXIMUM LOAD PER AXLE (kg)	SPEED LIMIT(km/h)
215/75 R16	10PR	116/144R	2500 / 4720	170
235/65 R16	12PR	121/119R	2900 / 5440	170

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA

INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
	RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
65	4½J	4,00B, 4,50B, 4J, 5J	157	551	D	A	71	B
65	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	D	A	71	B
65	5½J	5J, 6J	188	650	D	A	71	B
65	5½J	5J, 6J	198	669	D	A	72	B
69	5J	4 ½ J, 5½J,	172	672	D	A	71	B
69	5J	5½J, 6J	180	692	D	A	71	B
69	5½J	5J, 6J	196	708	D	A	72	B
69	5½J	6J, 6½J	203	718	D	A	72	B
69	6J	5½J, 6½J, 7J	216	734	C	A	72	B
76	6J	6½J, 7J	223	744	C	A	72	B
65	6J	5J, 5½J	201	655	D	A	72	B
65	6J	5½J, 6½J	209	669	D	A	72	B
65	6½J	5½J, 6J, 7J	221	683	D	A	72	B
65	6½J	6J, 7J	228	697	C	A	72	B
54	6J	5½J, 6½J	209	647	D	A	72	B
69	6J	5½J, 6½J	209	672	D	A	72	B
69	6½J	6J, 7J	221	687	D	A	72	B
69	6½J	6J, 7J	228	699	C	A	72	B
69	7J	6½J, 7½J	240	712	C	A	72	B
54	6J	5½J, 6½J	201	640	D	A	72	B



INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
	RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
65	4½J	4,00B, 4,50B, 4J, 5J	154	550	E	B	72	A
65	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	E	B	72	A
65	5½J	5J, 6J	188	650	D	B	72	A
65	5½J	5J, 6J	198	666	D	B	72	A
69	5J	5½J, 6J	184	684	D	B	72	A
69	5½J	5J, 6J	196	698	D	B	72	A
76	5½J	6J, 6½J	203	711	D	B	72	A
76	6J	5½J, 6½J, 7J	216	728	C	A	72	A
76	6J	6½J, 7J	225	747	C	A	72	A
65	6J	5J, 5½J	198	661	D	B	72	A
65	6J	5½J, 6½J	221	673	D	B	72	A
65	6½J	5½J, 6J, 7J	220	684	D	A	72	A
65	6½J	6J, 7J	222	698	D	A	72	A
54	6½J	6J, 7J	211	660	D	A	72	A
69	6J	5½J	201	660	D	B	72	A
69	6J	5½J, 6½J	200	677	D	B	72	A
69	6½J	6J, 7J	215	690	D	A	72	A
69	6½J	6J, 7J	228	698	D	A	72	A
69	7J	6½J, 7½J	238	716	C	A	72	A
80	7J	6½J, 7½J	238	716	D	A	72	A
76	8½J	8J, 9J	297	778	D	A	71	A
54	6J	5½J, 6½J	201	640	D	B	72	A



INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
	RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
76	6J	5½J, 6½J, 7J	218	728	C	A	71	B
83	7J	6½J, 7½J	238	711	C	A	71	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.


*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

Petlas Passenger Car, 4x4 & SUV and LTR tires are characterized by quality workmanship, leading edge technology, unique tread design and excellent performance, offering a mix of quality and value.

Our success depends on offering reliable products with an approach of excellence beyond expectations and supporting our customers by firmly standing behind our products and services.

Our aim is to build long term relationships with our customers by providing ultimate quality and excellent service to fulfill our promises.

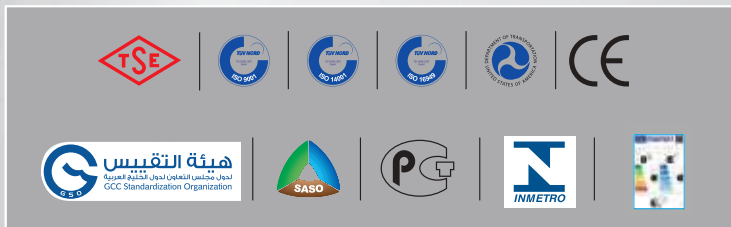




petlas
TRACK OF TRUST

2022 EDITION

DISTRIBUTED BY

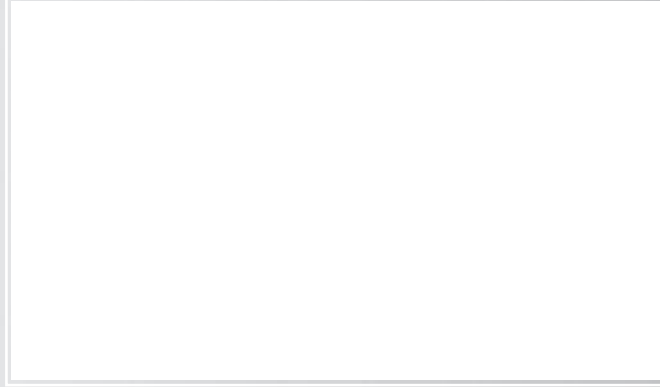

petlas

Headquarters - Factory

Petlas Tire Industry and Trade
Kindam Mahallesi Ankara - Kayseri Caddesi
No: 2/1 Kırşehir / TURKEY
T: +90 386 252 65 50 • F: +90 386 252 65 70

Int. Sales & Marketing

Petlas Tire Industry and Trade Ako Kule
Söğütözü Mh. 2178. Cd. No: 6
06530 Ankara/TURKEY
T. +90 312 309 30 30 • F: +90 312 309 22 66

Petlas Tire USA

1111 E. Lincolnway STE 205
Cheyenne, WY 82001 USA

www.petlas.com

MADE IN TÜRKİYE